DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R1W

SEC 4	SEC 3
SEC 9	SEC 10

U.S.B.&M.

V–13



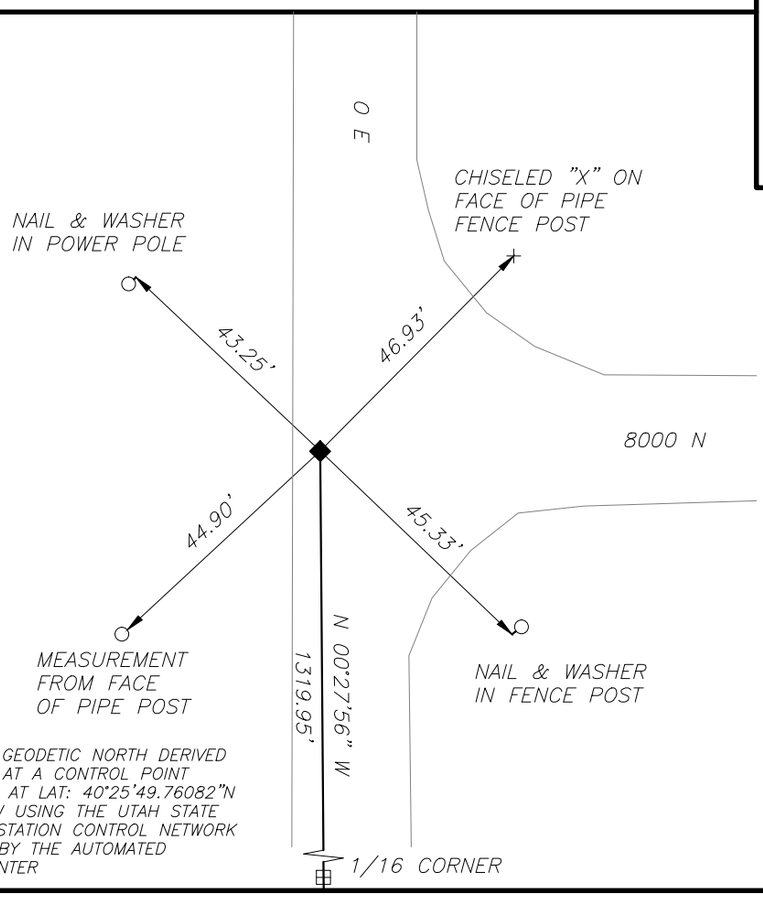

NORTH

SCALE: 1"=30'

0' 30'

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT: 40°25'49.76082"N & LONG: 110°01'53.39890"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 5/8" X 12" REBAR IN HOLE ON THE WEST EDGE OF A COUNTY ROAD SET BY OTHERS

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A 5/8" X 24" REBAR WITH 2½" ALUMINUM DUCHESNE COUNTY CAP ON THE WEST EDGE OF COUNTY ROAD

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7324564.75
E: 2060243.09

LATITUDE: 40°25'05.16460" N

LONGITUDE: 109°59'31.59742" W

PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0010W0_400600

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 16 JUN 2017

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

PROFESSIONAL LAND SURVEYOR
No. 148951
JERRY D. ALLRED
16 JUN '17
STATE OF UTAH