DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S
R3W R2W
1/4
SEC 12 | SEC 7
U.S.B.&M.

T-1 & T-25



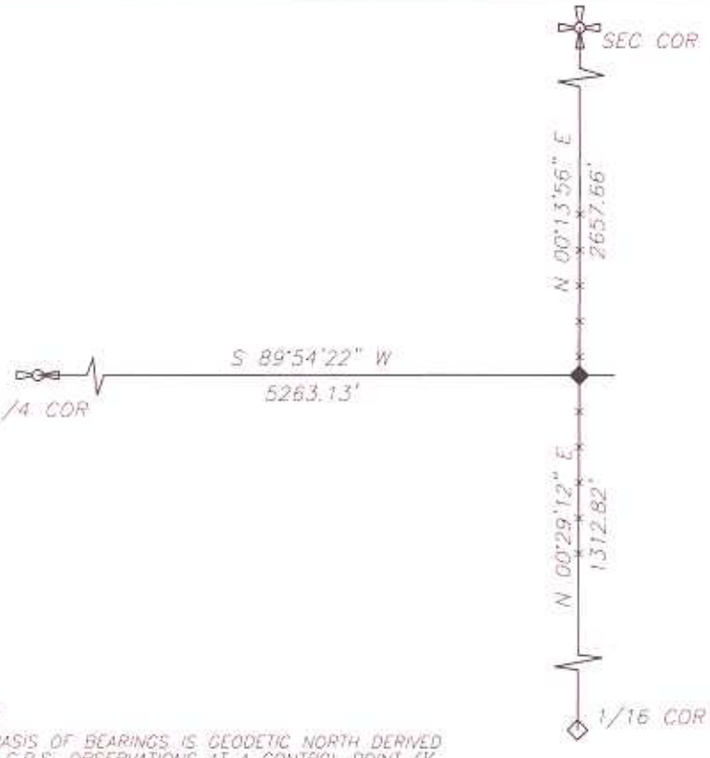

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (¼ CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

SCALE: 1"=30'
0' 30'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 2-3/4" DIA. GALVANIZED CAP ON PIPE AT CORNER POSITION WITH MARKED STONE SET ALONGSIDE IN NORTH-SOUTH FENCE

CAP STAMPED: 1960
T2S
S12 ¼ S7
R3W R2W

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

TIED CAP INTO VRS CONTROL NETWORK AND REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N:7289224.716
E:2013572.456

LATITUDE: 40°19'23.30677" N

LONGITUDE: 110°09'41.79513" W

PUBLIC LAND SURVEY SYSTEM GCDB ID NO.

UT300030S0020W0_100540

CERTIFICATION

I Jerry D. Allred Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Sep 2010

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

PROFESSIONAL LAND SURVEYOR
No. 148951
JERRY D. ALLRED
28 Sep '10
STATE OF UTAH

SCANNED 2010