


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1N R1W
 $\frac{1}{4}$
 SEC 30 | SEC 29
 U.S.B.&M.

LINE	BEARING	DISTANCE
L1	N 51°54'30" E	41.36'
L2	N 55°19'11" E	48.23'
L3	S 81°51'20" E	33.60'

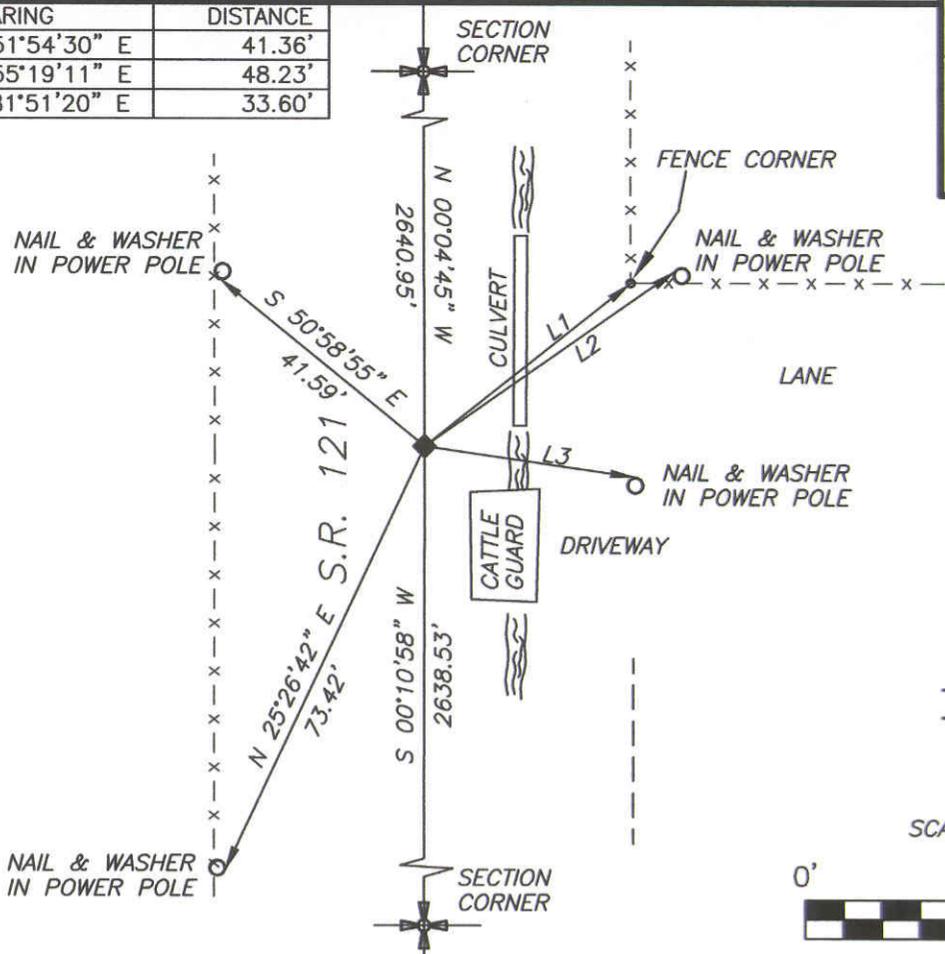

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND $\frac{1}{2}$ " REBAR BELOW THE ROAD SURFACE IN THE EAST SHOULDER OF ROAD

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 9 Dec 2004

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor

