

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1N
R2W R1W


NOTE:
BEARINGS BETWEEN
CORNERS AND TIES ARE
ASSUMED, AND FOR
RELATIVE PURPOSES ONLY

LINE	BEARING	DISTANCE
L1	S 00°49'19" W	45.52'
L2	N 44°50'26" W	39.61'
L3	N 19°10'12" W	97.40'
L4	N 17°55'10" W	28.29'
L5	N 02°27'05" W	25.46'
L6	N 01°30'27" E	19.12'
L7	N 18°49'33" E	100.51'
L8	N 41°01'23" E	50.05'
L9	N 55°07'13" E	60.18'
L10	N 86°56'04" E	21.21'
L11	N 88°09'03" E	29.35'
L12	N 88°26'56" E	35.24'


SEC 24 | SEC 19
SEC 25 | SEC 30

U.S.B.&M.

J-25



1"=30'

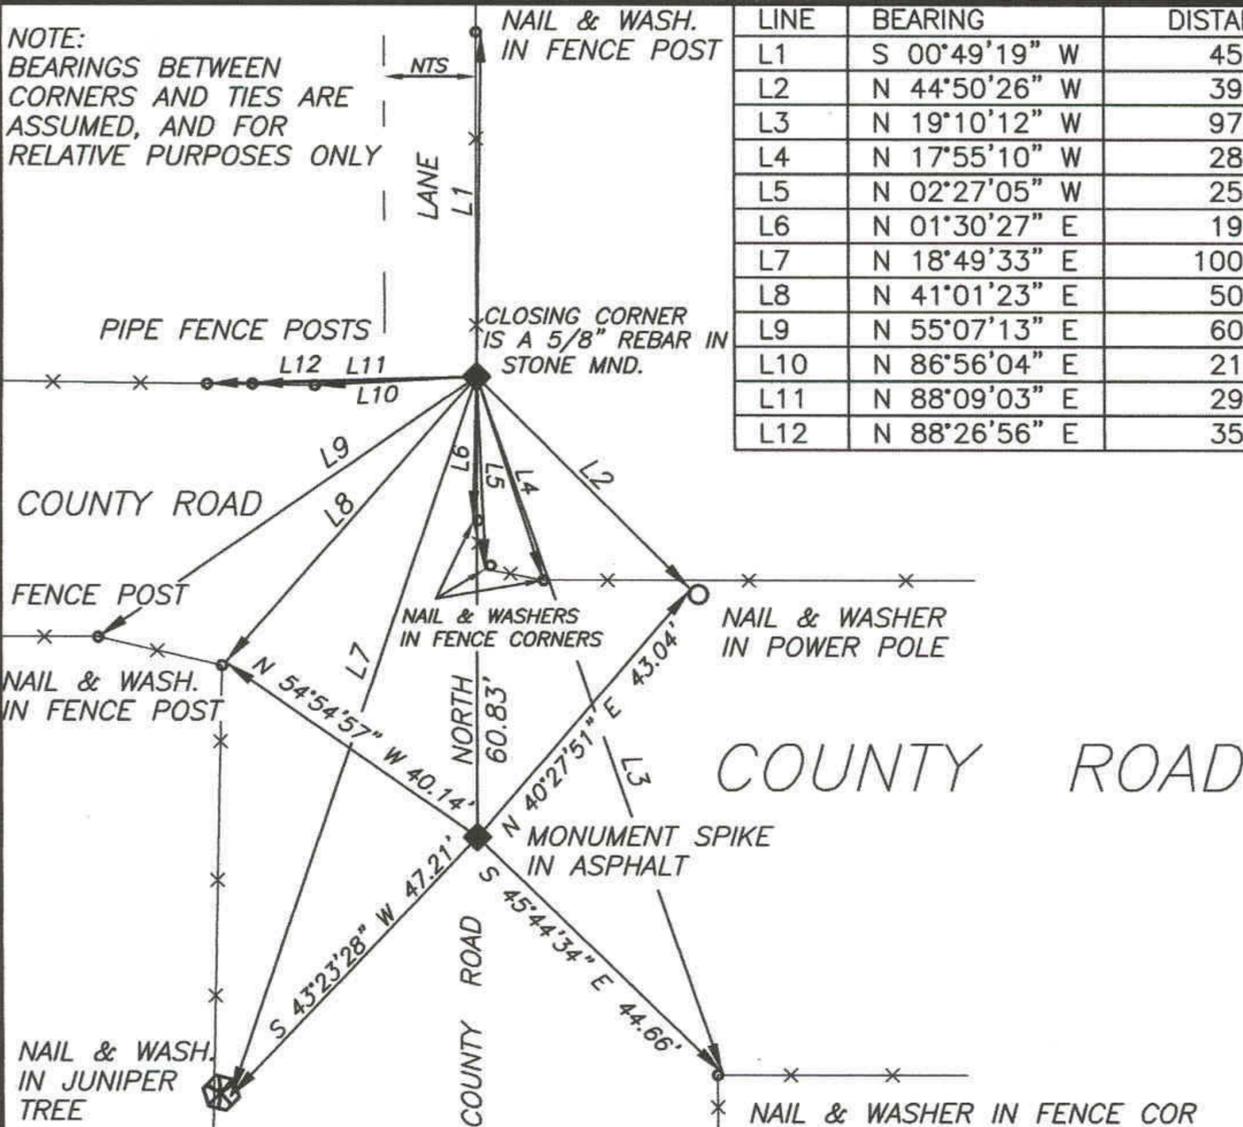

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND (5/8" REBAR IN STONE MOUND) CLOSING CORNER TO SECTIONS 24 AND 25, 60.83 FEET NORTH OF THE CORNER OF SECTIONS 19 AND 30 (MONUMENT SPIKE IN ASPHALT) AS PER PREVIOUS TIE SHEETS.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

(REFERENCED AS SHOWN)

STATE PLANE COORDINATE DATA

WGS-84 FOR CLOSING CORNER (5/8" REBAR)

LAT: N 40°27'43.6649"
LONG: W 110°02'56.0716"
APPROX. MSL ELEVATION: 6359'


NOTE: ELEVATION OF MONUMENT IS ±6 FEET

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Mar 2003

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

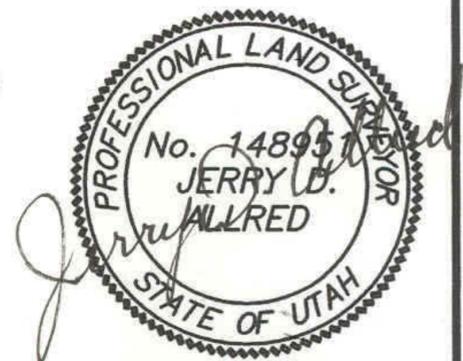

5 2 Apr 03