
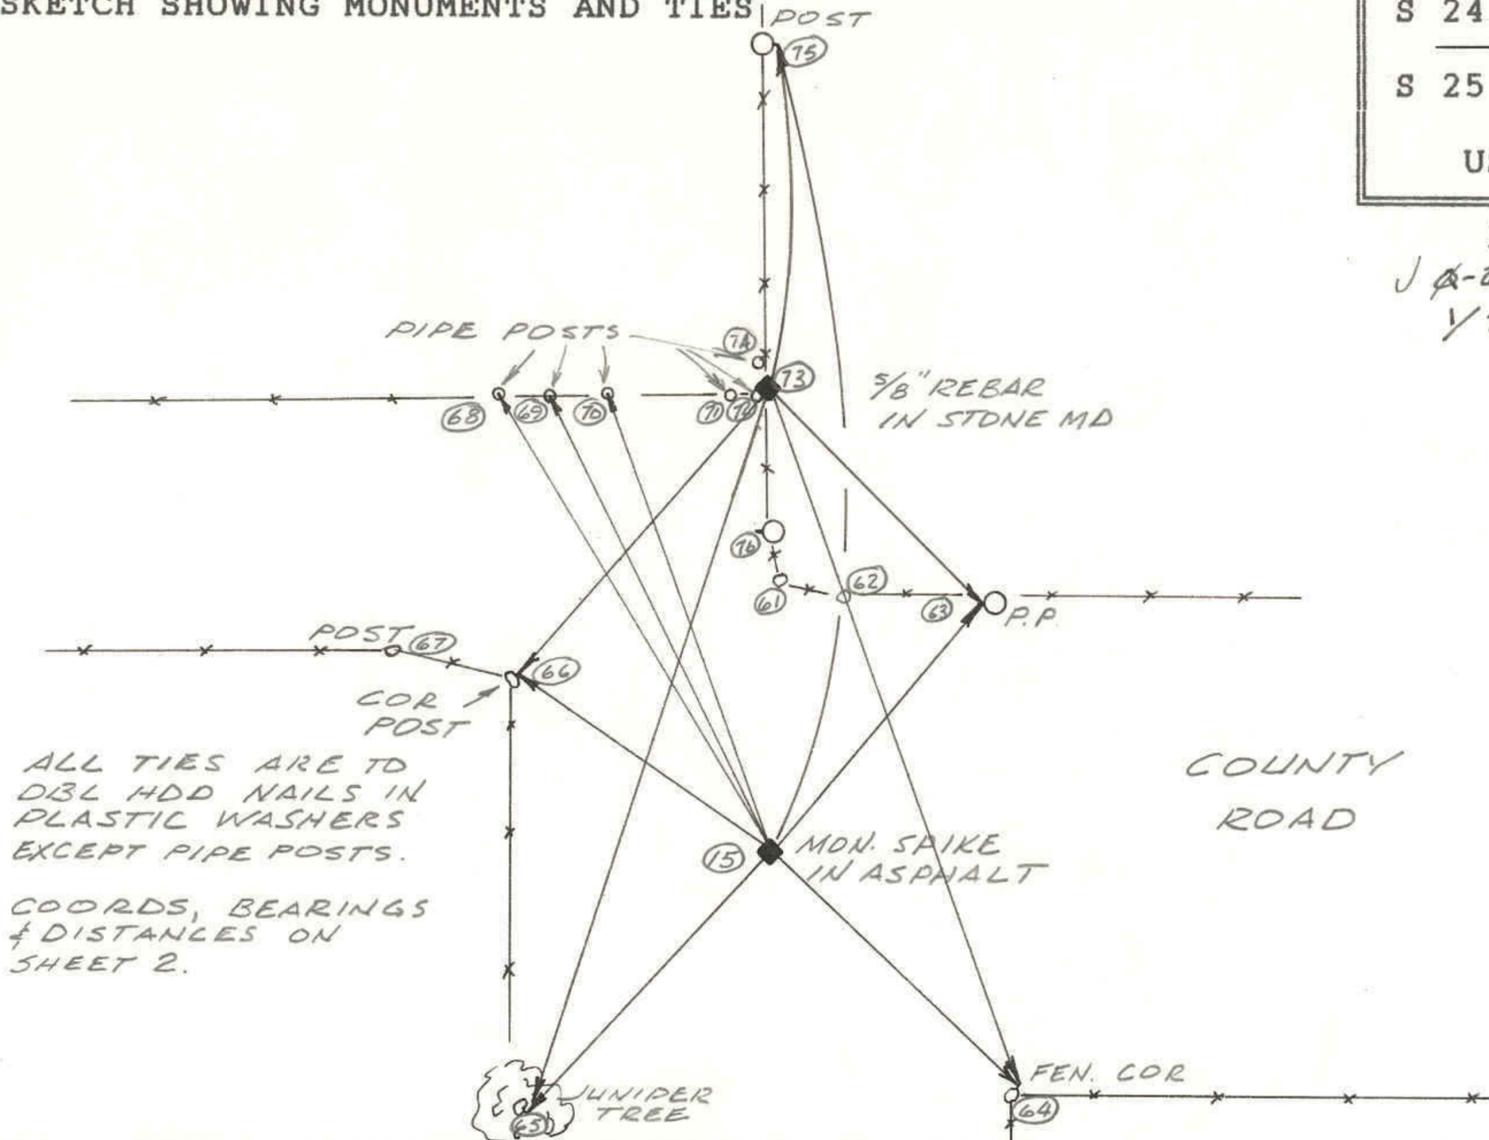
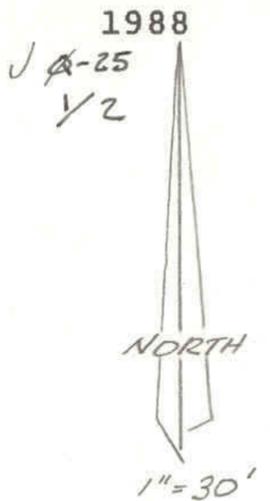


DUCHESNE COUNTY SURVEY MONUMENT RECORD

SKETCH SHOWING MONUMENTS AND TIES

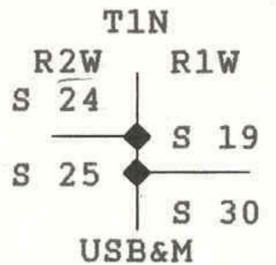

DESCRIPTION OF CORNER EVIDENCE FOUND

The position of the corner to Sections 19 and 30 was determined by establishing the centerlines of the County roads going South and East using the old right-of-way fences as evidence. The corner for Sections 24 and 25 was then determined to be on the township line between the above mentioned corner and the Northwest Corner of Section 19 (marked by an existing marked stone) at an existing fence corner at approximately the distance called for in the record for the closing corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

A monument spike was driven in the asphalt of the county road for the corner to Sections 19 and 30 and referenced as shown.
A 5/8" rebar was set in a stone mound at the fence corner for the corner to Sections 24 and 25 and referenced as shown.

STATE PLANE COORDINATE DATA

CERTIFICATION

I JERRY D. ALLRED, Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Date 11 JULY 1988

Jerry D. Allred
Signature of Surveyor

3817
Reg. No.