

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R1W



S1/16

+

SEC 16

U.S.B.&M.

0-11

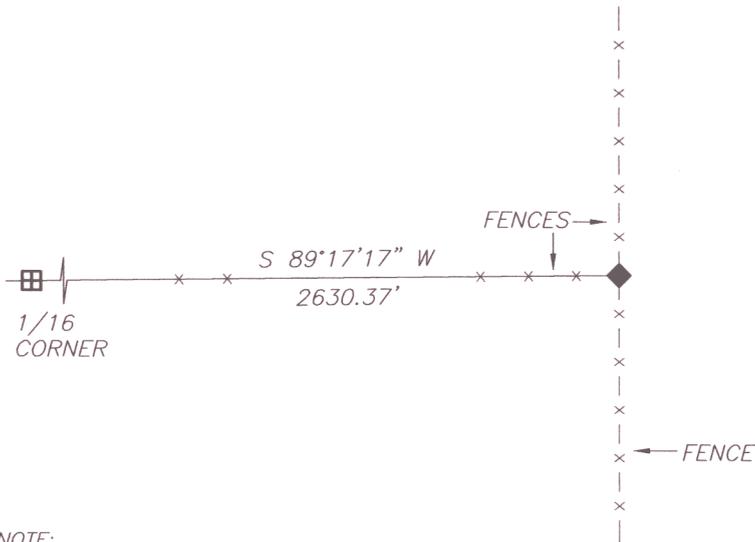

SCALE: 1"=30'



NOTE:
THE BASIS OF BEARINGS IS GEODETIC
NORTH DERIVED FROM G.P.S. OBSERVATIONS
AT A CONTROL POINT LOCATED AT
LAT: 40°20'35.62573"N AND
LONG: 109°59'30.14134"W USING THE
UTAH STATE G.P.S. VIRTUAL REFERENCE
STATION CONTROL NETWORK MAINTAINED
AND OPERATED BY THE AUTOMATED
GEOGRAPHIC REFERENCE CENTER.

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 5/8" REBAR AT EXISTING 3-WAY FENCE CORNER AT POSITION OF THE S1/16 CORNER.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN.

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7315282.122
E: 2057794.894

LATITUDE: 40°23'33.852"N

LONGITUDE: 110°00'05.258"W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0010W0_340420

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 14 Nov 2011

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

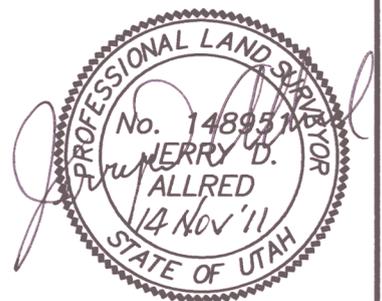

SCANNED 14 Nov 2011