

SKETCH SHOWING RELATIVE LOCATION OF MONUMENT AND REFERENCE POINTS.


T1S R1W
 1/4 — 31 —
 6
 T2S
 U.S.B. & M.

1981
 CORNER IDENTIFICATION
 A X-3

ALL POST TIES ARE TO
 DBL. HD. NAILS W/BRASS WASHERS.

SET METAL FENCE POST
 0.8' NORTH AND 0.3' WEST
 OF CORNER.

MARKED STONE IS ON SOUTH
 SIDE OF MONUMENT.

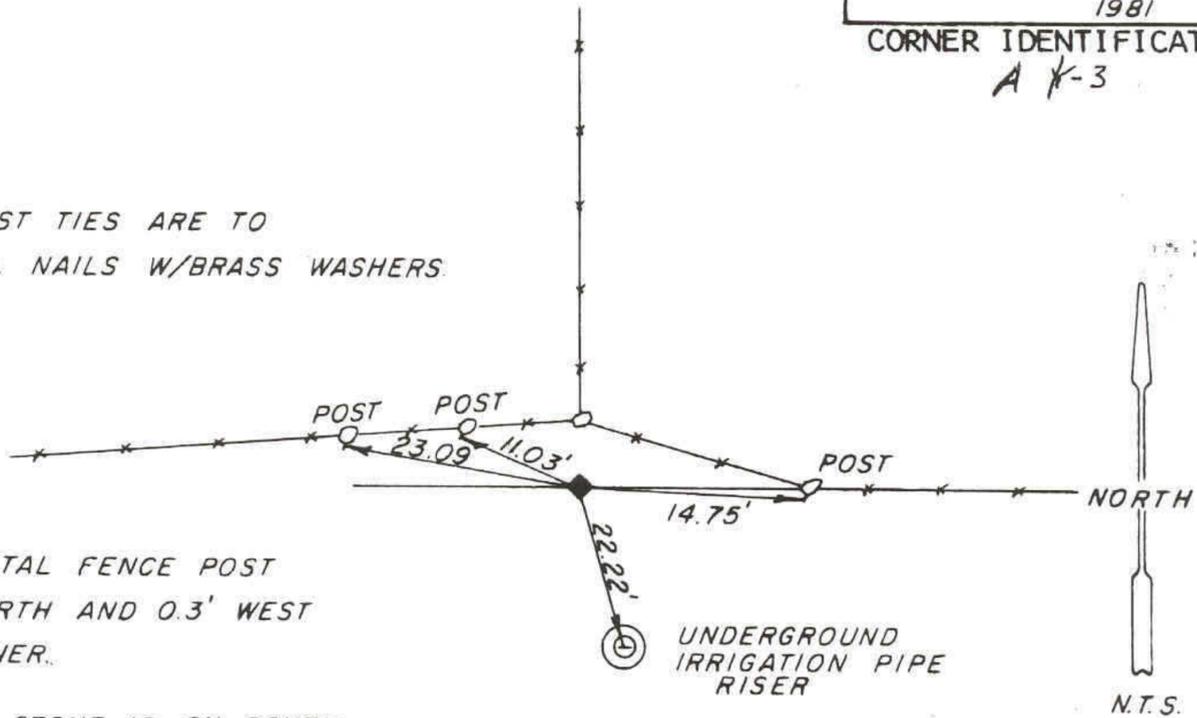

CERTIFICATION

I, JERRY D. ALLRED Registered Land Surveyor, State of Utah,
 hereby certify that I have performed or reviewed the work done on the
 diagrammed corner as reported on this recordation form and approve same.

S 2 Apr 83

Jerry D. Allred
 Signature of Surveyor

3817
 Reg. No. 1/15/82

DUCHESNE COUNTY, UTAH

LAND SURVEY MONUMENT RECORD

DESCRIPTION OF CORNER EVIDENCE FOUND AND ORIGINAL RECORD, (if known).

Found original marked stone.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
 THE ORIGINAL LOCATION OF THIS CORNER.

Set 2½" dia. aluminum monument at position of corner and re-set
 marked stone with face against monument. Stamped:

DUCHESNE COUNTY SURVEY

T1S R1W

S 31

1/4 — — — — —

S 6

T2S

1981

STATE PLANE COORDINATE DATA (if any)