
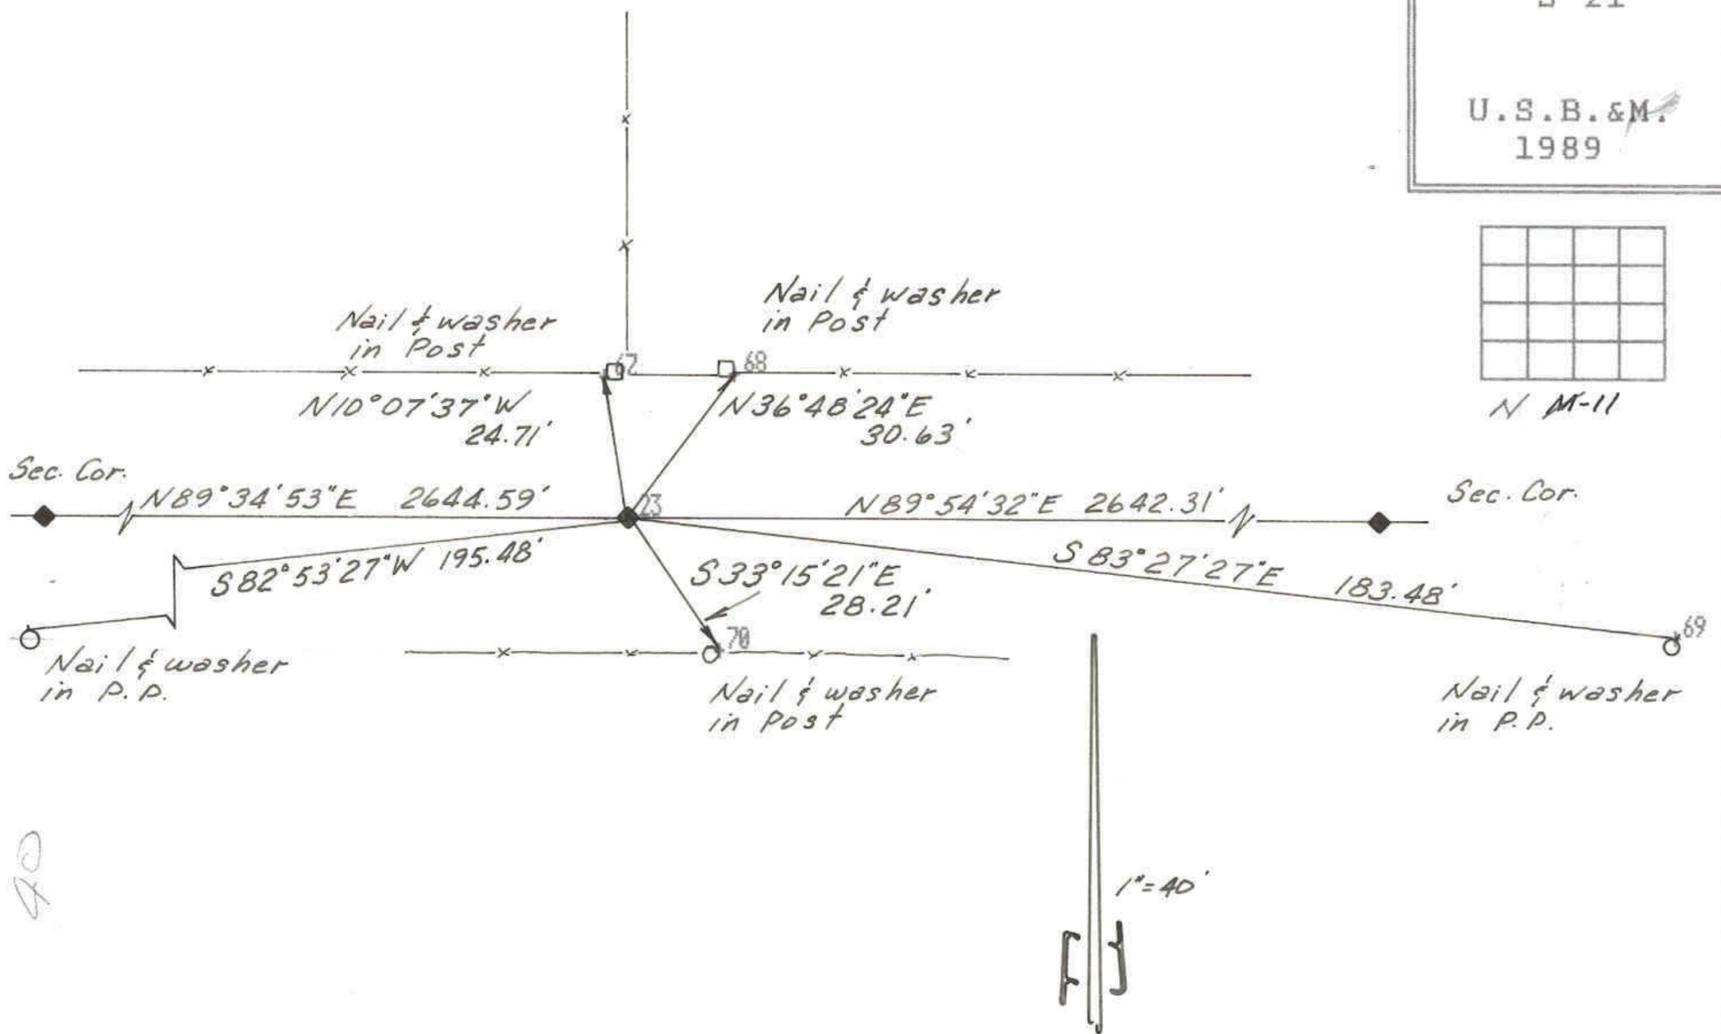


DUCHESNE COUNTY SURVEY MONUMENT RECORD

SKETCH SHOWING MONUMENTS AND TIES

T1S R3W
S 16
1/4 —◆—
S 21

U.S.B.&M.
1989



DESCRIPTION OF CORNER EVIDENCE FOUND

The position of this corner was determined from ties of a previous survey and using existing fence line evidence.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

Set a temporary corner using a power hammer nail in a brass washer at the point of the corner approximately 0.1 feet below the surface of the County Road. The road was too frozen to install Co. Mon at the time of this referencing.

STATE PLANE COORDINATE DATA



CERTIFICATION

I Jerry D. Allred, Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Date 28 Dec '89

Jerry D. Allred
Signature of Surveyor

3817
Reg. No.