

DUCHESNE COUNTY MONUMENT SURVEY RECORD


T1S R3W

NUMBER	DIRECTION	DISTANCE
L1	S 45°21'47" E	39.73'
L2	S 00°21'42" E	31.84'
L3	S 17°20'27" W	33.79'
L4	S 38°38'14" W	41.66'
L5	S 43°42'38" W	45.19'
L6	S 48°04'27" W	49.18'
L7	N 38°27'05" W	46.79'
L8	N 31°11'27" W	42.75'
L9	N 27°36'32" W	47.57'
L10	N 38°03'46" E	55.76'


SEC 7 | SEC 8  
SEC 18 | SEC 17

U.S.B.&M.

R 1-5



C O U N T Y

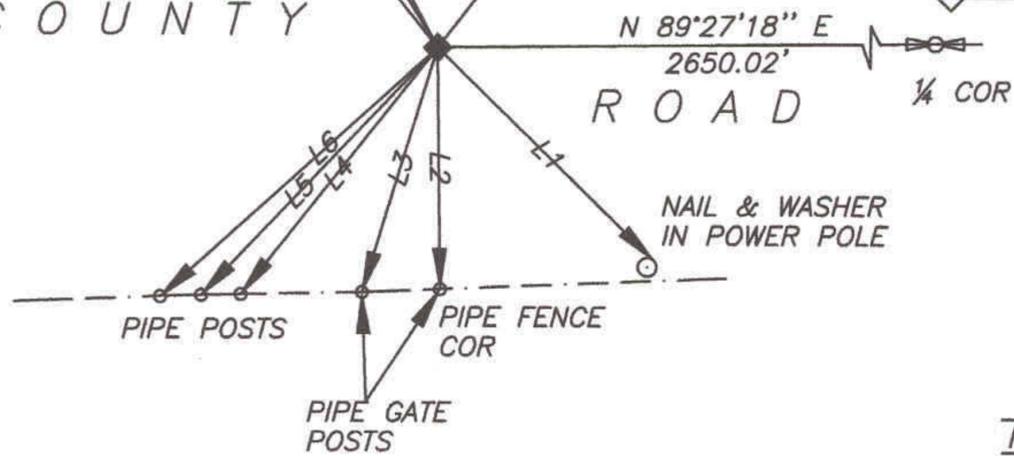

1"=30'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND SPIKE APPROX. 0.15' UNDER SURFACE OF ASPHALT ROAD

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

(REFERENCED AS SHOWN)

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Licensed Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 11 Dec 2000

Jerry D. Allred 148951  
Signature of Surveyor License No.