


LINE TABLE FOR SHADED AREA

LINE	BEARING	DISTANCE
L1	S 00°01'04" W	41.41'
L2	S 89°44'25" W	11.23'
L3	N 02°44'36" W	81.36'
L4	N 02°27'39" W	42.26'
L5	N 02°19'19" W	56.71'
L6	N 03°45'18" W	51.06'
L7	N 04°40'57" W	26.73'
L8	N 05°07'21" W	59.10'
L9	N 04°09'51" W	111.72'
L10	N 05°07'04" W	54.46'
L11	N 00°01'33" E	17.01'
L12	S 88°33'18" E	38.53'
L13	S 00°33'46" E	456.28'

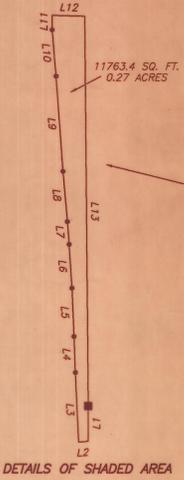

NARRATIVE

This survey was performed at the request of Mr. Durrell Farnsworth for the purpose of locating the Southeast Corner of the NW1/4 of the NW1/4 (Lot 1) of Section 18 and surveying in the positions of the old existing fence and the newer fence as constructed by Mr. Kim Lindsay.

This section was originally surveyed using the "3-mile method" by the General Land Office in 1882 during which time the quarter-quarter corners (a.k.a. 1/16 corners) were set. A search was made around the perimeter of Lot 1. Monument spikes were found in the county roads at the SW, NW, and NE corners of this quarter-quarter section. The Southeast corner was missing. A search of the next 1/4 mile east found an old existing north-south fence very close to the record distance from the west section line. This fence was used to control the east-west position of this quarter-quarter corner. No evidence was found at the next 1/4 mile east. Old existing right-of-way fences were found at the east section line and taken together with the position of the Northeast section corner were used to determine the east-west position of the SE corner of the NE1/4 of the NE1/4 of said section. In addition, an old east-west fence was found continuing east from this corner and was used to establish the north-south position of this corner. With this corner reestablished the bearing from it to the monument spike found at the SW corner of Lot 1 was used to fix the north-south positions of the quarter-quarter corners along this line. The Southeast Corner of Lot 1 was then determined by single proportionate measure along this line between the found monument spike and the old existing fence found at the center of the section. The relationships of the measured distances between these reestablished points compared to the record dimensions on the G.L.O. plot for this quarter-quarter line agree remarkable close. The area between the quarter-quarter line and the old fence was then determined as shown on the plat.

The Mountain Home Townsite was created in 1913 and was laid out with right angles to the west line of Lots 1 and 2 of Section 18 and tied to the Northwest Corner of the section. Several old lot line fences were found and tied to the present survey (corner posts were surveyed in as shown on the plat) to help show the relationship of the townsite to the quarter-quarter lines because of the many conflicting elements in the property descriptions along the east line of the townsite. The resolution of these conflicts is beyond the scope of this project.

LEGEND AND NOTES

- G.L.O. INDICATES RECORD DISTANCE FROM GENERAL LAND OFFICE SURVEY PLAT OF 1882
- ◆ MONUMENT SPIKE FOUND BY THIS SURVEY
- 5/8"x24" REBAR WITH ALUM CAP SET BY THIS SURVEY
- FOUND OLD CORNER POST IN TOWNSITE SURVEY

THIS SURVEY WAS PERFORMED USING GLOBAL POSITIONING SYSTEM (G.P.S.) PROCEDURES AND EQUIPMENT. THE BEARINGS ARE BASED ON WGS84 DATUM.

DESCRIPTION OF HATCHED AREA

Beginning at the Southeast Corner of the NW1/4 of the NW1/4 of Section 18, Township 1 South, Range 4 West of the Utah Special Base and Meridian:

Thence South 00°01'04" West 41.41 feet along the East line of the SW1/4 of said NW1/4 of said NW1/4;

Thence South 89°44'25" West 11.23 feet along an existing fence and extension thereof to the remnants of an old North-South fence line;

Thence the following eight courses along the remnants of said old fence line:

- North 02°44'36" West 81.36 feet;
- North 02°27'39" West 42.26 feet;
- North 02°19'19" West 56.71 feet;
- North 03°45'18" West 51.06 feet;
- North 04°40'57" West 26.73 feet;
- North 05°07'21" West 59.10 feet;
- North 04°09'51" West 111.72 feet;
- North 05°07'04" West 54.46 feet to an old fence corner;

Thence North 00°01'33" East 17.01 feet to a fence;

Thence South 88°33'18" East 38.53 feet along said fence to the East line of said NW1/4 of said NW1/4;


Thence South 00°33'46" East 456.28 feet along said West line to the Point of Beginning, containing 0.27 acres

SURVEYOR'S CERTIFICATE

This is to certify that I have surveyed the parcel shown on this plat, and that the monuments indicated were found or set during said survey, and that this plat accurately represents said survey to the best of my knowledge.



Jerry D. Allred, Duchesne County Surveyor
Utah Certificate Number 14895

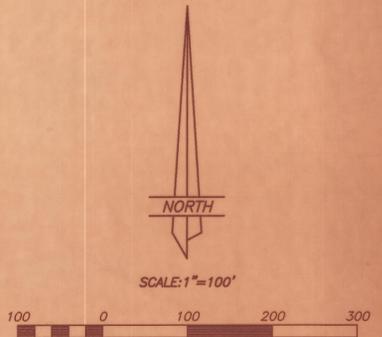

**FENCE LOCATION SURVEY FOR
DURELL FARNSWORTH**
SECTION 18, TOWNSHIP 1 SOUTH, RANGE 4 WEST
UINTAH SPECIAL BASE AND MERIDIAN

COUNTY SURVEYOR'S FILE # 1264

JERRY D. ALLRED AND ASSOCIATES
SURVEYING CONSULTANTS
121 NORTH CENTER ST.,—P.O. BOX 975
DUCHESE, UTAH 84021
(435) 738-5352

REVISED 15 OCT 2002
1 JUL 2002 02-100-063