


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R5W
N 1/16

SEC 34 — SEC 35



U.S.B.&M.

D-17



NUMBER	DIRECTION	DISTANCE
L1	S 81°12'38" W	33.21'
L2	S 86°06'23" E	29.51'
L3	S 67°13'32" E	33.19'
L4	S 36°29'08" E	74.04'
L5	S 25°06'57" E	78.69'
L6	S 23°03'06" E	85.33'
L7	S 17°58'56" E	61.21'

NOTE;
PAVEMENT NOT TO SCALE

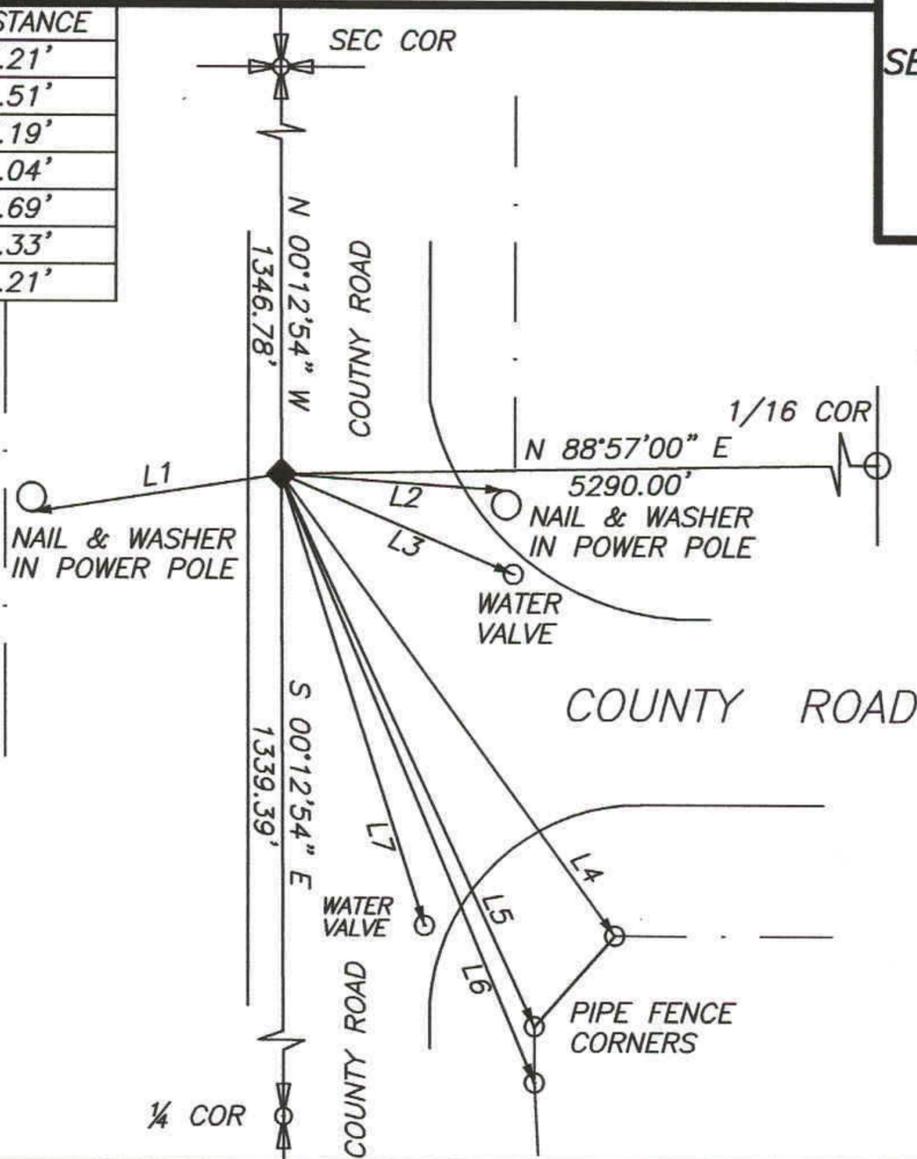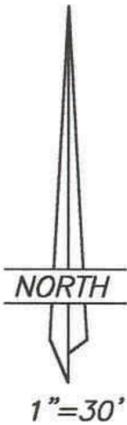

DESCRIPTION OF CORNER EVIDENCE FOUND

NORTH-SOUTH POSITION OF CORNER WAS DETERMINED BY OLD FENCE LINES
EAST-WEST POSITION OF CORNER WAS DETERMINED TO BE ON THE LINE BETWEEN
THE CORNERS TO THE NORTH AND SOUTH

**DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
THE ORIGINAL LOCATION OF THE CORNER**

SET 5/8" REBAR WITH ALUMINUM CAP AT CORNER

(REFERENCED AS SHOWN)

STATE PLANE COORDINATE DATA

CERTIFICATION

20 DEC 2002

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 13 Nov 2002

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

