


DUCHESNE COUNTY SURVEY MONUMENT RECORD

SKETCH SHOWING MONUMENTS AND TIES

T1S R5W
S 27
1\4
S 34
USB&M
1988

E 4-15

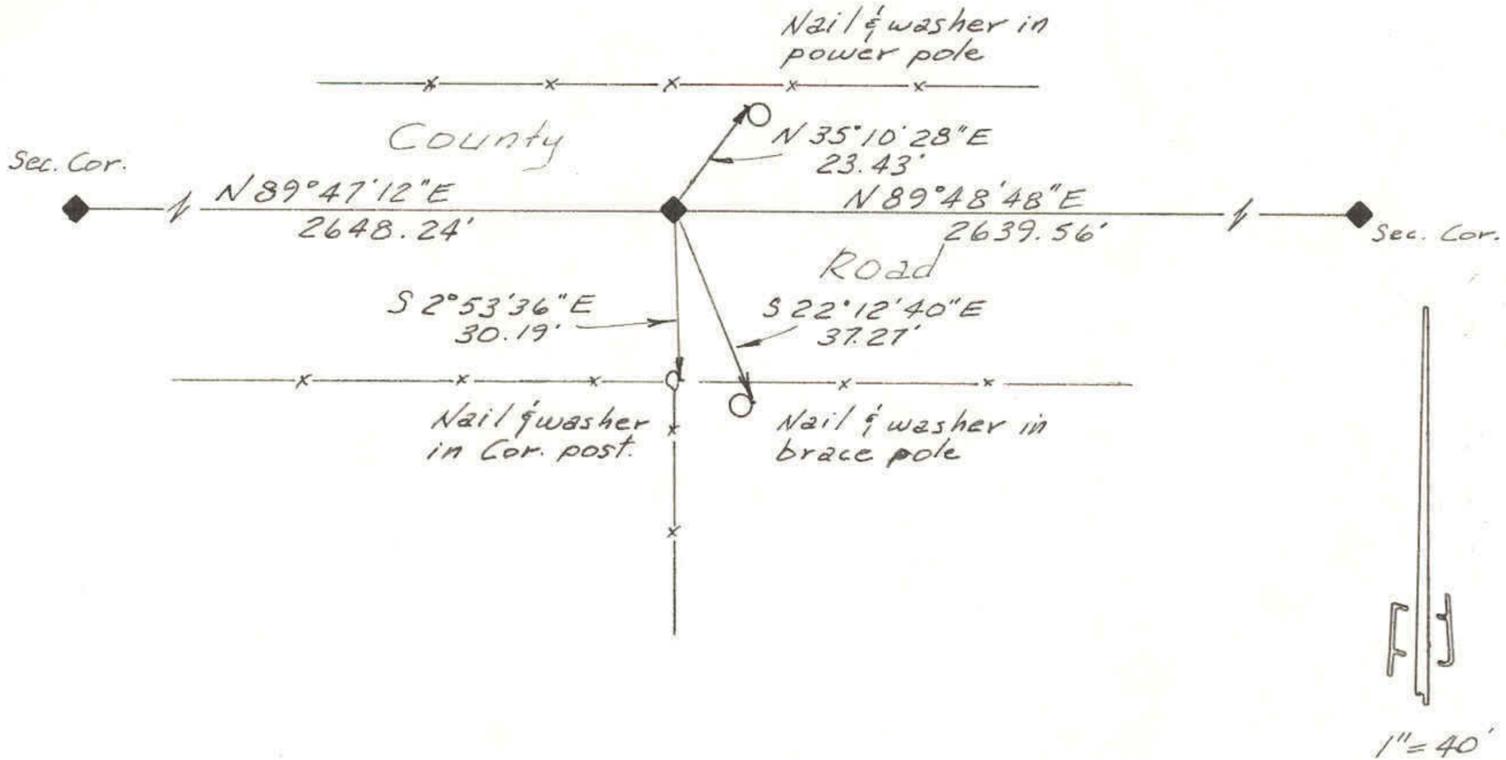

DESCRIPTION OF CORNER EVIDENCE FOUND

The position of this corner was determined from old right-of-way fences and an existing fence line going through the center of the section to the south and evidence of another fence line going through the center of the section to the north (splices in the existing north r-o-w fence). In addition a strong signal was picked up by the metal detector at this location under the relatively new asphalt very close to the straight line between the section corners East and West, indicating a monument re-established by others. The asphalt was not excavated due to the frost.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

It is not practical at this time to set an aluminum monument in the asphalt of the road--the ground is too frozen in the roadway. Therefore, a monument spike was driven into the asphalt at the position described above and referenced as shown.

STATE PLANE COORDINATE DATA

CERTIFICATION

I JERRY D. ALLRED, Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Date 26 Dec '88

Jerry D. Allred
Signature of Surveyor

3817
Reg. No.