
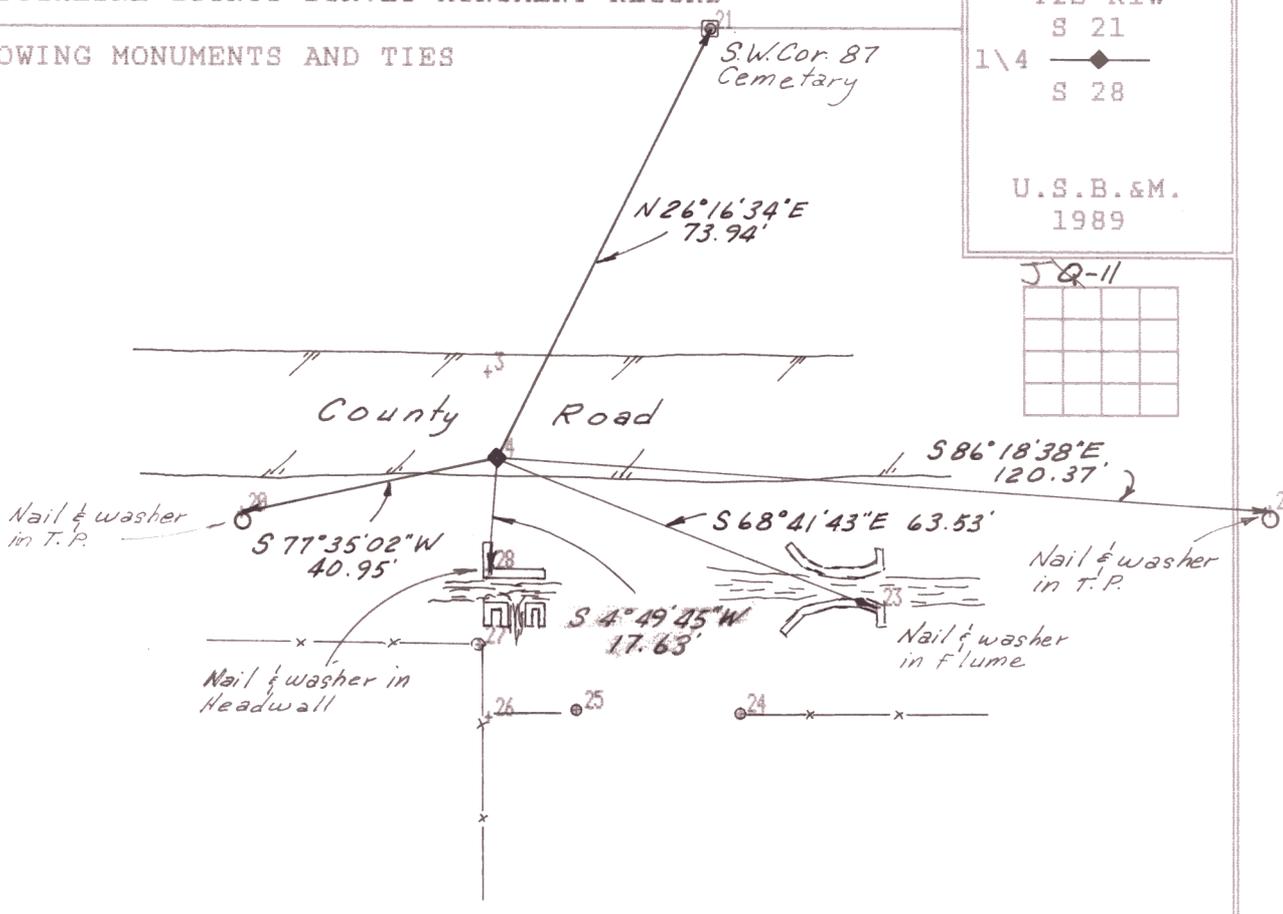


DUCHESNE COUNTY SURVEY MONUMENT RECORD

SKETCH SHOWING MONUMENTS AND TIES

T2S R1W
S 21
1\4 —◆—
S 28

U.S.B.&M.
1989



DESCRIPTION OF CORNER EVIDENCE FOUND

Found 1\2"X24" rebar in County Road at the position of the corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

Set 2-1\2" dia. aluminum County monument at position of corner, stamped:

DUCHESNE COUNTY SURVEY
UNLAWFUL TO DISTURB

T2S R1W
S 21
1\4 —◆—
S 28
1989

Referenced as shown.

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Date 6 Sept '89


Jerry D. Allred
Signature of Surveyor

3817
Reg. No.

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S R1W
 S 21
 1/4 —◆—
 S 28

U.S.B.&M.

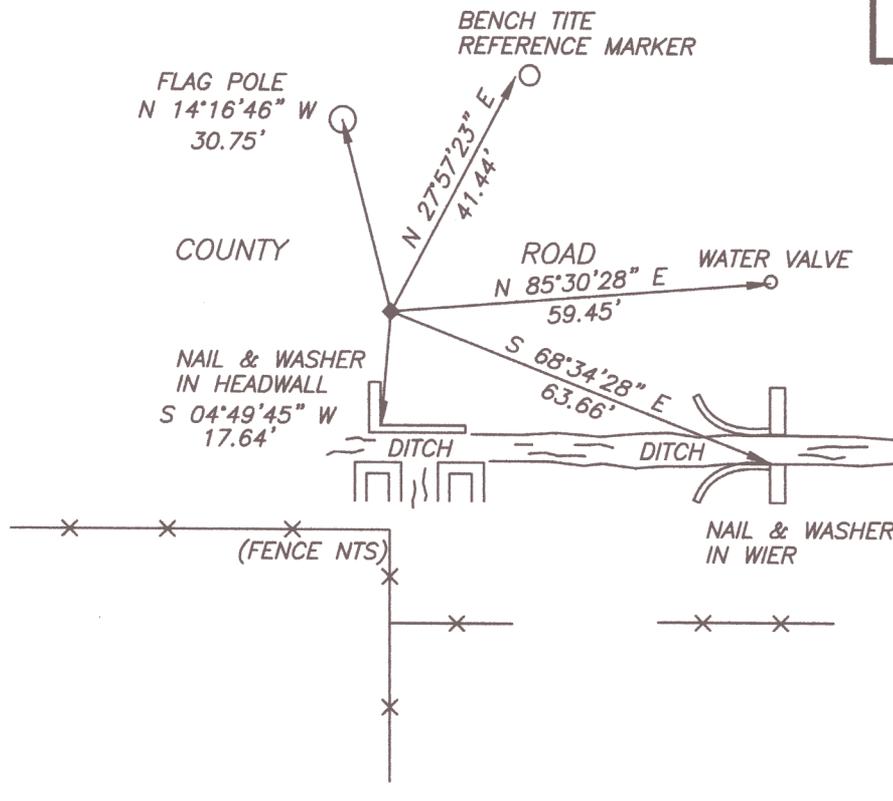

DESCRIPTION OF CORNER EVIDENCE FOUND

PREVIOUS COUNTY MONUMENT WAS REFERENCED PRIOR TO COUNTY ROAD CONSTRUCTION THEN RESET AS PER TIES

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 2-1/2" DIA. ALUMINUM COUNTY MONUMENT AT POSITION OF CORNER, STAMPED:
 DUCHESNE COUTNY SURVEY
 UNLAWFUL TO DISTURB
 T2S R1W
 S 21
 1/4 —
 S 28
 1999

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Licensed Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 25 Jan 2000

Jerry D. Allred 148951
 Signature of Surveyor License No.



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S R1W

SEC 21
1/4 ———
SEC 28

U.S.B.&M.

J-11

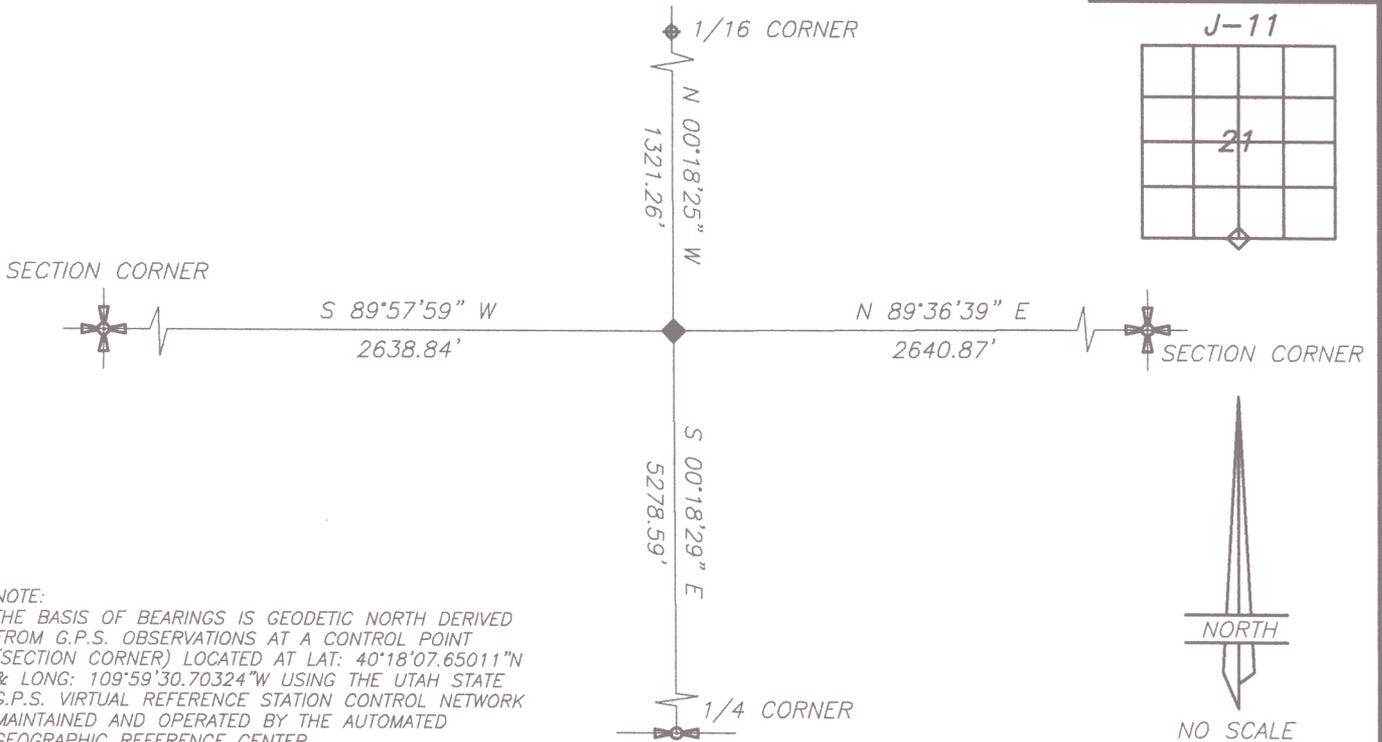


NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT: 40°18'07.65011"N & LONG: 109°59'30.70324"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND REMNANTS OF A 5/8" REBAR AND ALUMINUM COUNTY CAP THAT HAD BEEN SHEARED OFF DURING WINTER SNOW REMOVAL

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

RESET 1/4 CORNER USING A 5/8"x20" REBAR WITH DUCHESNE COUNTY ALUMINUM MONUMENT SET IN CONCRETE JUST BELOW THE SURFACE OF THE ROAD

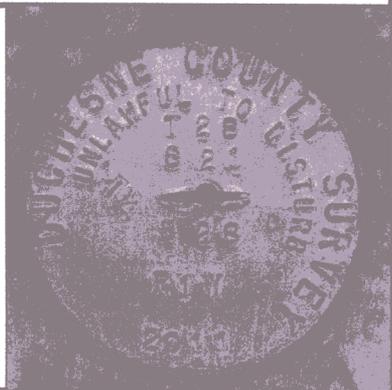

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE

N: 7276993.466
E: 2058506.415

LATITUDE: 40°17'15.404"N
LONGITUDE: 110°00'04.355"W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300020S0010W0_340300

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 14 Nov 2011

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

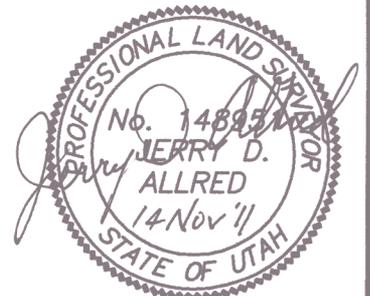

SCANNED 15 Nov 2011