

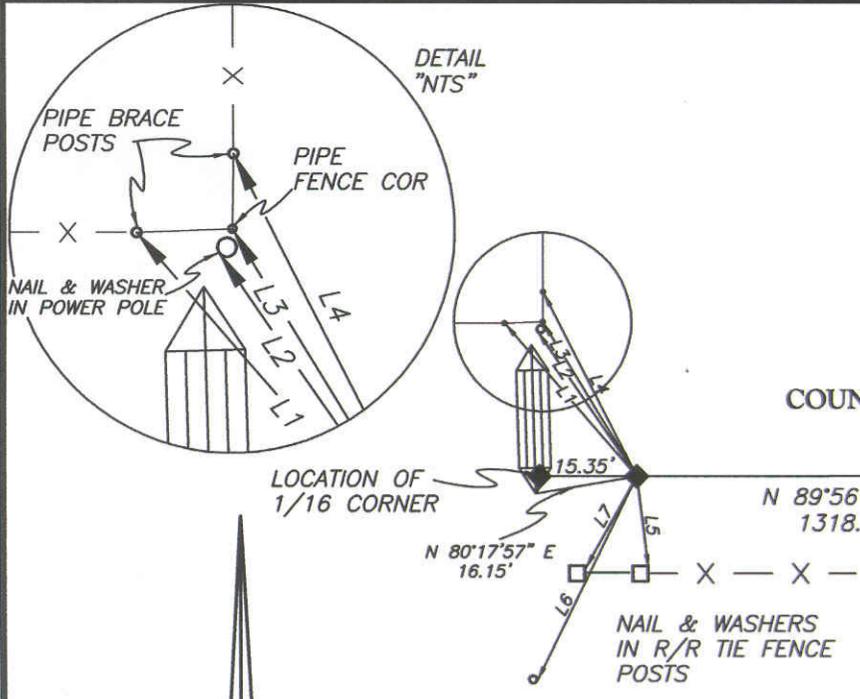


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R3W
 SEC 33
 W1/16 —+—
 SEC 4
 T2S R3W
 U.S.B.&M.



NORTH




LINE	BEARING	DISTANCE
L1	N 41°01'12" W	31.64'
L2	N 34°37'16" W	27.48'
L3	N 31°29'41" W	28.24'
L4	N 27°02'39" W	32.31'
L5	S 06°59'28" E	14.65'
L6	S 26°28'28" W	35.60'
L7	S 29°36'59" W	16.61'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND ORIGINAL STONE MONUMENT AT THE 1/16 CORNER IN 1983 AND REMONUMENTED WITH A DUCHESNE COUNTY ALUMINUM MONUMENT. CORNER WAS SUBSEQUENTLY DESTROYED DURING CONSTRUCTION OF A CATTLE GUARD. THE POSITION OF THE CORNER WAS REESTABLISHED BY PREVIOUS SURVEYS.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 5/8"x24" REBAR WITH 2 1/2" ALUMINUM COUNTY MONUMENT, STAMPED;

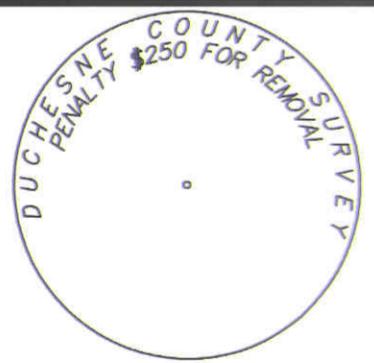

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 9 Dec 2004

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor

