
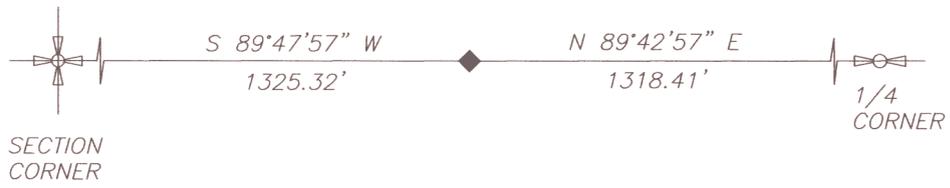


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S R3W
 SEC 32
 W1/16 +
 SEC 5
 T3S
 U.S.B.&M.



NOTE:
 THE BASIS OF BEARINGS IS GEODETIC
 NORTH DERIVED FROM G.P.S. OBSERVATIONS
 AT A CONTROL POINT LOCATED AT
 LAT: 40°15'21.05806"N AND
 LONG: 110°14'03.37938"W USING THE
 UTAH STATE G.P.S. VIRTUAL REFERENCE
 STATION CONTROL NETWORK MAINTAINED
 AND OPERATED BY THE AUTOMATED
 GEOGRAPHIC REFERENCE CENTER.

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 2½" G.L.O. BRASS CAP AT THE POSITION OF THE W1/16 CORNER,
 BETWEEN SECTIONS 5 AND 32 STAMPED;



DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN.

STATE PLANE COORDINATE DATA
 (U.S. SURVEY FEET)
 NAD 83 UTAH CENTRAL ZONE
 N: 7265108.023
 E: 1988745.833


LATITUDE: 40°15'28.545"N
LONGITUDE: 110°15'06.660"W
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300020S0030W_220100

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 14 Nov 2011

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor

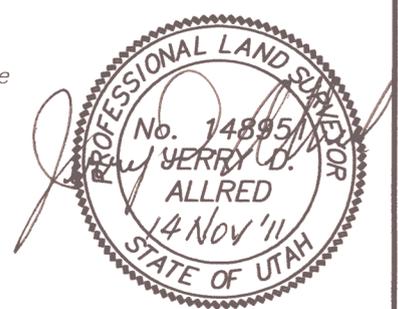

SCANNED 14 NOV 2011