

DUCHESNE COUNTY MONUMENT SURVEY RECORD





T2S R3W

SEC 3

C1/4

U.S.B.&M.

X-15

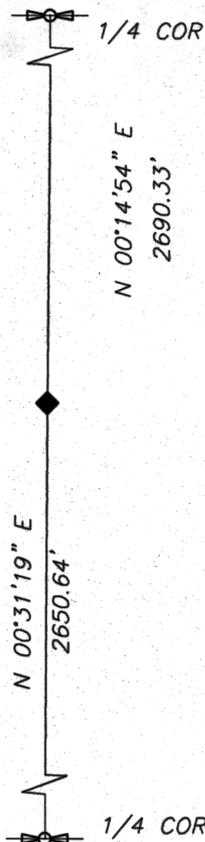

NOTE:

THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (1/4 CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND MARKED STONE

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET COUNTY MONUMENT

TIED MONUMENT INTO VRS CONTROL NETWORK

STATE PLANE COORDINATE DATA (U.S. SURVEY FEET)

UTAH CENTRAL ZONE

N:7294265.857
E:2000292.678

LATITUDE: 40°20'15.049" N

LONGITUDE: 110°12'32.301" W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. 440640

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Aug '09

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

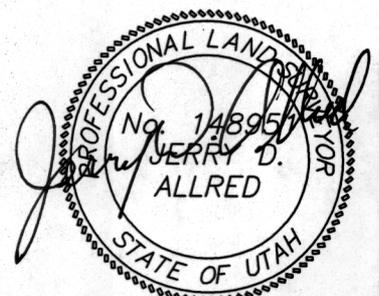

DUCHESNE COUNTY SURVEY MONUMENT RECORD


SKETCH SHOWING MONUMENTS AND TIES:

T2S,R3W

C

1/4
SEC 3
U.S.B. & M.
1985

X 2-15

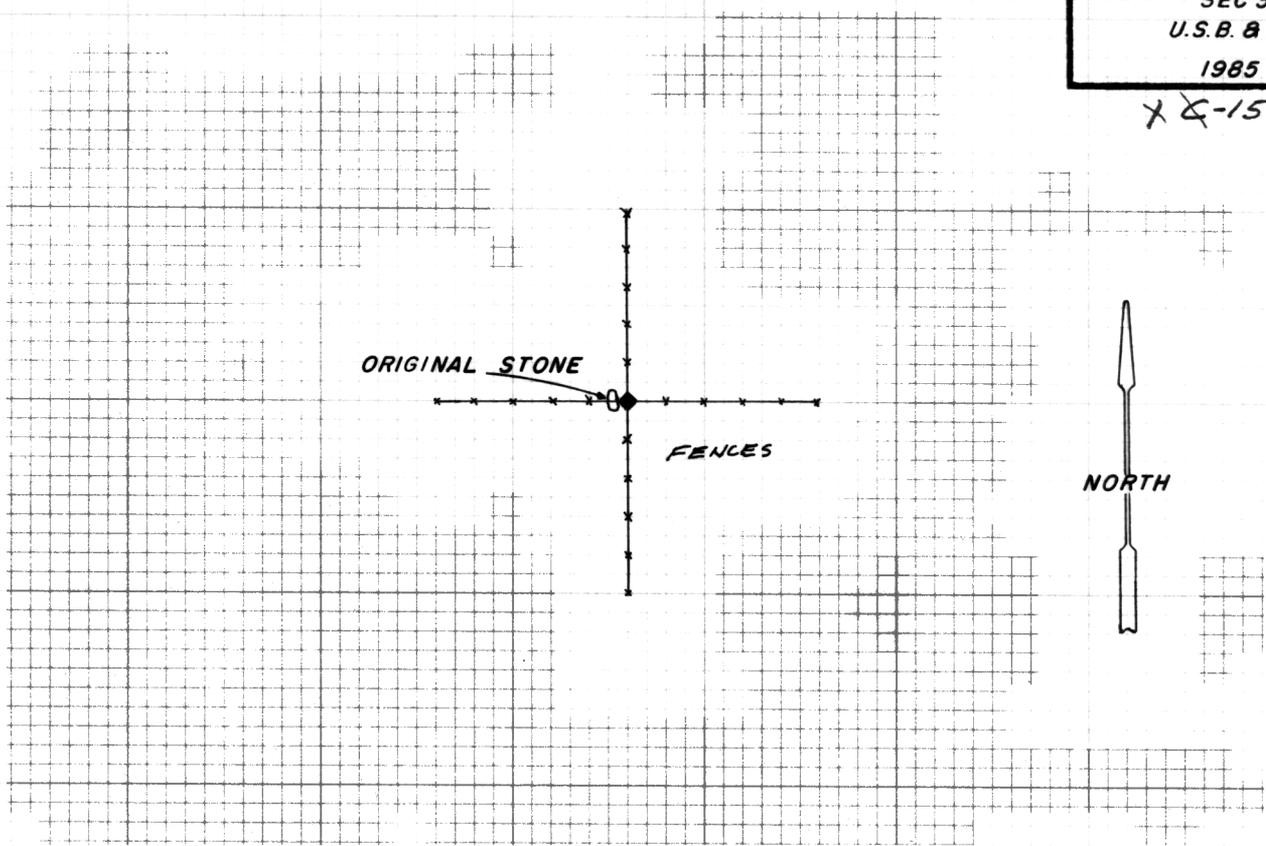

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found original marked stone.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER:

Set a 2½" dia. aluminum monument at the position of the marked stone, stamped
DUCHESNE COUNTY SURVEY
UNLAWFUL TO DISTURB
T2S,R3W.

C
+
1/4
SEC. 3
1985

STATE PLANE COORDINATE DATA:

CERTIFICATION:

I Jerry D. Allred Registered Land Surveyor, State of Utah, hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same.

Date: 21 Nov. '85

Jerry D. Allred
Signature of Surveyor

3817
Reg. No.