DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S
R3W R2W
SEC 36 | SEC 31
SEC 1 | SEC 6
T2S
U.S.B.&M.

A-25 & A-1



Z-25 & Z-1

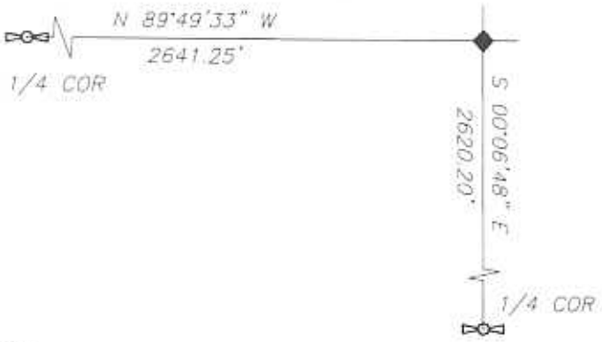

NOTE:

THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (¼ CORNER) LOCATED AT LAT. 40°23'18.204"N AND LONG. 110°10'15.865"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

SCALE; 1"=30'

0' 30'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND DUCHESNE COUNTY ALUMINUM CAP

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

TIED MONUMENT INTO VRS CONTROL NETWORK

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD '83 UTAH CENTRAL ZONE
N:7297125.547
E:2013455.898

LATITUDE: 40°20'41.394" N

LONGITUDE: 110°09'41.774" W

PUBLIC LAND SURVEY SYSTEM GCDB ID NO. 700100

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Aug '09

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

PROFESSIONAL LAND SURVEYOR
No. 148951
JERRY D. ALLRED
STATE OF UTAH

SCANNED 2005