


DUCHESNE COUNTY MONUMENT SURVEY RECORD

NUMBER	DIRECTION	DISTANCE
L1	N 29°36'51" W	48.06'
L2	N 29°30'56" W	46.67'
L3	N 32°27'53" E	47.25'
L4	N 42°53'11" E	58.01'
L5	S 42°15'18" E	42.43'
L6	S 40°48'24" E	37.83'
L7	S 18°40'46" E	80.43'
L8	S 14°18'05" W	33.56'
L9	S 36°14'50" W	40.27'
L10	S 37°06'32" W	37.59'



T2S
R4W
SEC 33 | SEC 34
SEC 4 | SEC 3
T3S
U.S.B.&M.
A X-13
33

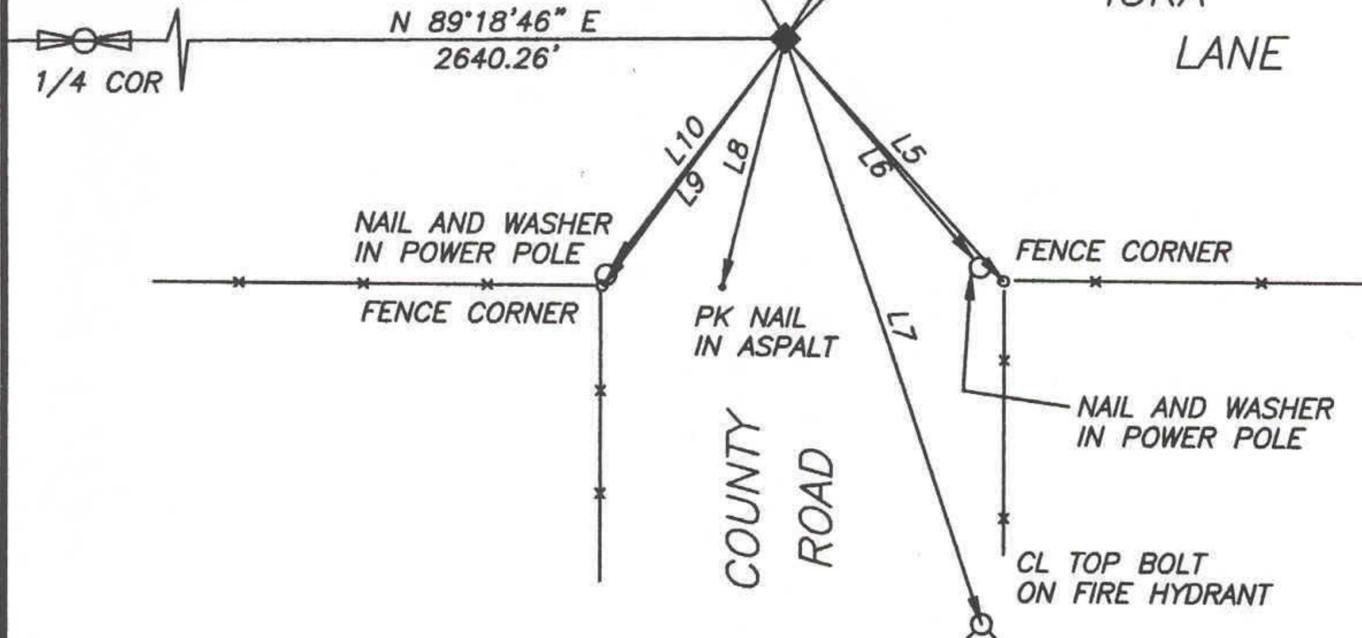

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND MONUMENT SPIKE IN ASPHALT AS PER TIES AT COUNTY SURVEYOR'S OFFICE

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Licensed Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 25 Feb 2000

Jerry D. Allred 148951
Signature of Surveyor License No.