


DUCHESNE COUNTY MONUMENT SURVEY RECORD


T1S R7W

SEC 33
 1/4 —◆—
 SEC 4
 T2S
 U.S.B.&M.


A-11 & Z-11



SECTION
CORNER

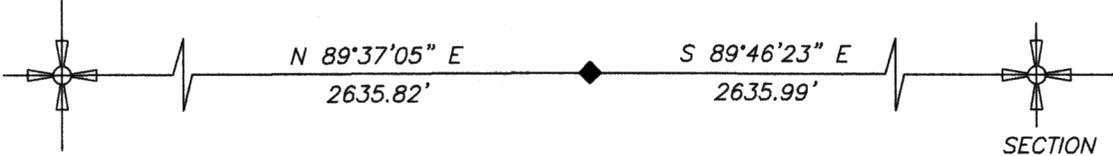

SECTION
CORNER



SCALE: 1"=30'

NOTE:
 THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM
 G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT
 LAT: 40°21'07.23762"N AND LONG: 110°42'37.33941"W
 USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION
 CONTROL NETWORK MAINTAINED AND OPERATED BY THE
 AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND B.L.M. ALUMINUM PIPE AND CAP MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
 (U.S. SURVEY FEET)
 NAD 83 UTAH CENTRAL ZONE
 7294504.868
 1868864.670

LATITUDE: 40°20'32.73464"N

LONGITUDE: 110°40'49.50641"W

PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0070W0_340100

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 27 Sep 2010

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor

