
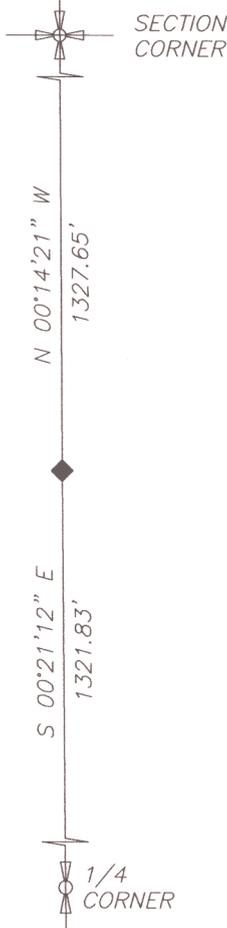


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R2W
 SEC 33 | SEC 34
 N 1/16
 U.S.B.&M.



NO SCALE

NOTE:
 THE BASIS OF BEARINGS IS GEODETIC
 NORTH DERIVED FROM G.P.S. OBSERVATIONS
 AT A CONTROL POINT (N1/16 CORNER
 SEC. 21) LOCATED AT LAT: 40°12'40.14273"N
 AND LONG: 110°06'51.09603"W USING THE
 UTAH STATE G.P.S. VIRTUAL REFERENCE
 STATION CONTROL NETWORK MAINTAINED
 AND OPERATED BY THE AUTOMATED
 GEOGRAPHIC REFERENCE CENTER.

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 5/8" REBAR WITH ALUMINUM CAP SET BY OTHERS AT POSITION
 OF THE NORTH 1/16 CORNER BETWEEN SECTIONS 33 AND 34.

**DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
 THE ORIGINAL LOCATION OF THE CORNER**

REFERENCED AS SHOWN.

STATE PLANE COORDINATE DATA
 (U.S. SURVEY FEET)
 NAD 83 UTAH CENTRAL ZONE
 N: 7238110.018
 E: 2030191.749


LATITUDE: 40°10'55.708"N
LONGITUDE: 110°06'17.534"W
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300030S0020W0_400160

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
 hereby certify that I have performed or reviewed the work done on the
 diagrammed corner as reported on this recordation form and approve same

Date 14 Nov 2011

Jerry D. Allred, Professional Land Surveyor
 Certificate No. 148951
 Duchesne County Surveyor

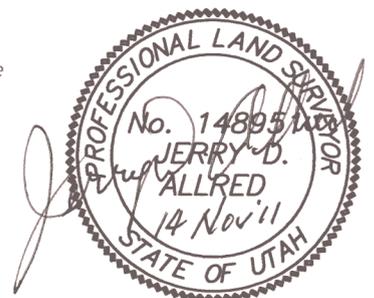

SCANNED 14 Nov 2011