
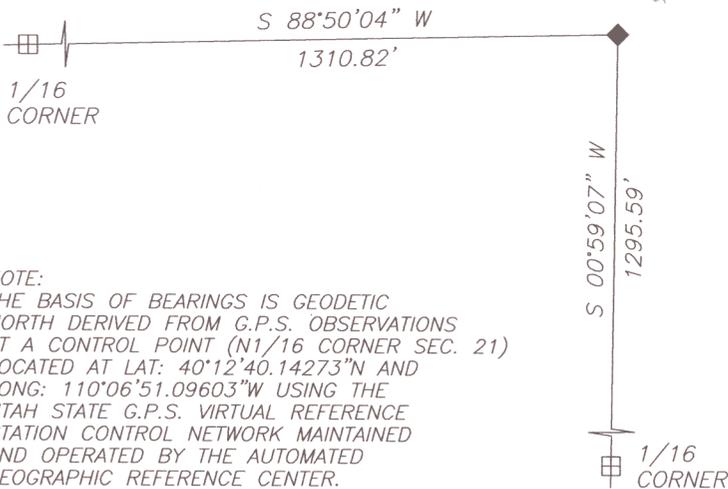


# DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R2W  
 SEC 28  
 +  
 NW 1/16  
 U.S.B.&M.

H-10




NO SCALE

NOTE:  
 THE BASIS OF BEARINGS IS GEODETIC  
 NORTH DERIVED FROM G.P.S. OBSERVATIONS  
 AT A CONTROL POINT (N1/16 CORNER SEC. 21)  
 LOCATED AT LAT: 40°12'40.14273"N AND  
 LONG: 110°06'51.09603"W USING THE  
 UTAH STATE G.P.S. VIRTUAL REFERENCE  
 STATION CONTROL NETWORK MAINTAINED  
 AND OPERATED BY THE AUTOMATED  
 GEOGRAPHIC REFERENCE CENTER.

### DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 1/2" G.L.O. BRASS CAP AT THE POSITION OF THE NW 1/16  
 CORNER SET DURING THE 1922 RE-SURVEY.

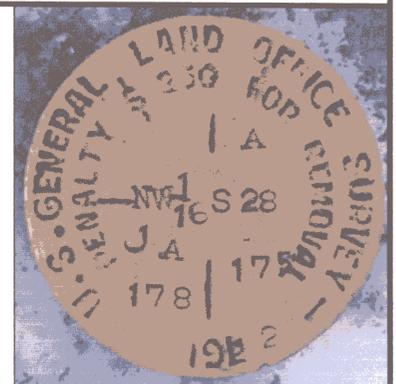

### DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN.

### STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
 NAD 83 UTAH CENTRAL ZONE  
 N: 7243261.849  
 E: 2026216.245

LATITUDE: 40°11'47.226"N

LONGITUDE: 110°07'07.727"W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300030S0020W0\_320260

### CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 14 Nov 2011

Jerry D. Allred, Professional Land Surveyor  
 Certificate No. 148951  
 Duchesne County Surveyor

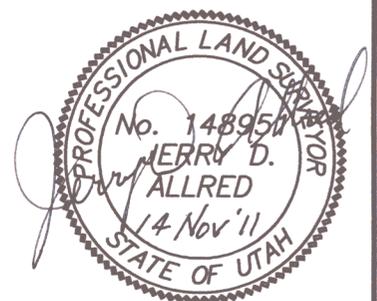

SCANNED 15 Nov 2011