
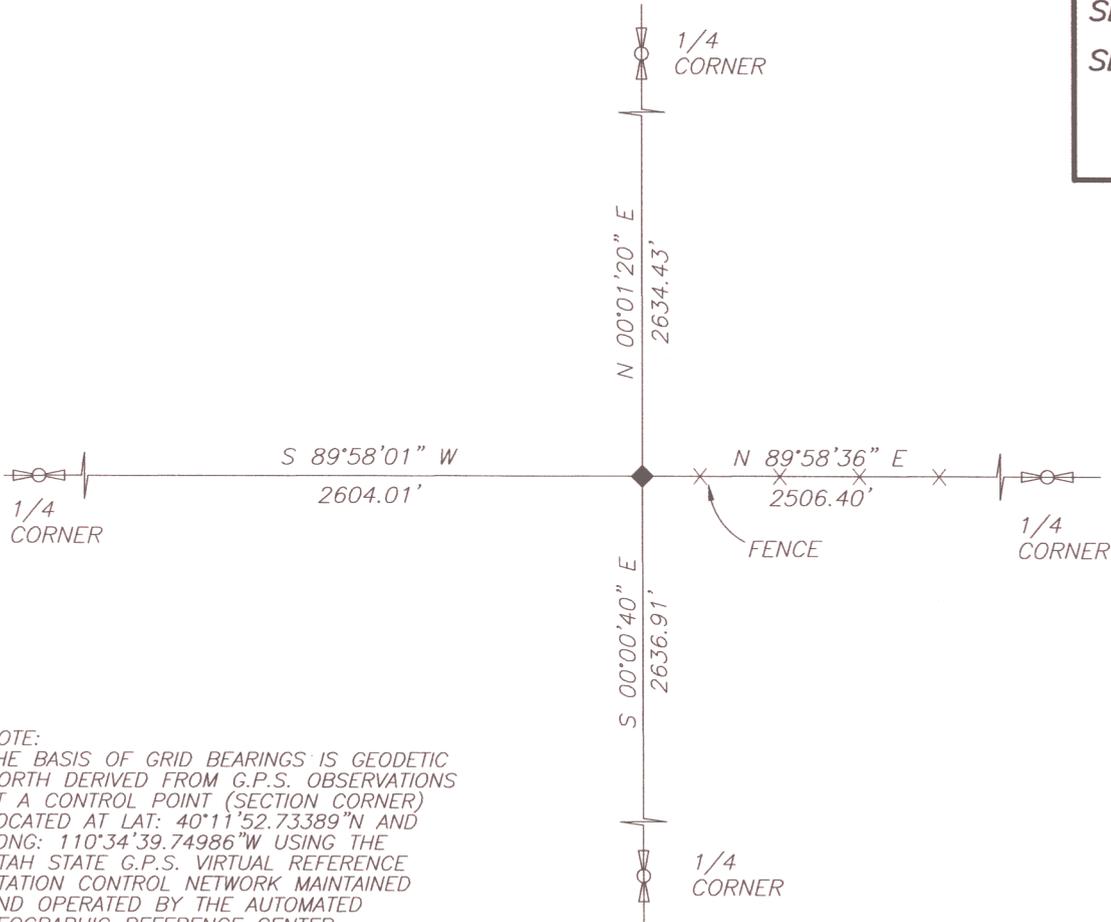


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S
R7W R6W
SEC 13 | SEC 18
SEC 24 | SEC 19

U.S.B.&M.

N-25 & N-1



NOTE:
THE BASIS OF GRID BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT: 40°11'52.73389"N AND LONG: 110°34'39.74986"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER.

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 5/8" REBAR WITH ALUMINUM CAP AT FENCE CORNER.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN.

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7247314.034
E: 1887562.012

LATITUDE: 40°12'44.628"N

LONGITUDE: 110°36'54.069"W


PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300030S0070W0_100400

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 14 Nov 2011

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

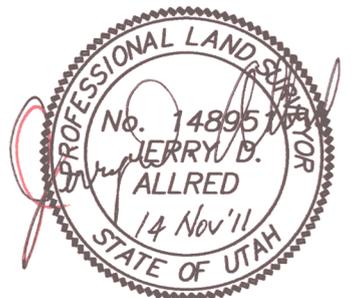

SCANNED 15 Nov 2011