


Index _____ CORNER RECORD _____ Tract or _____ Cor. _____
 File No. A-13 Survey No. _____ No. SC
 T 6 S R 6 W R.D. Duchesne County Duchesne
 M^o. Uintah Special N.F. Ashley State Utah

CORNER DIAGRAM

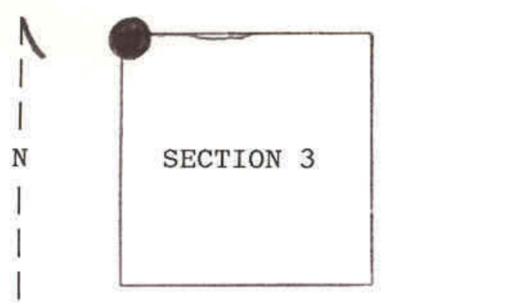

DESCRIBE CORNER MONUMENT FOUND

Found a 18"X 8"X 4" sandstone with 3 notches on the east side and 2 notches on the west, tilted but in the original position. A 1" dia. steel pipe was found driven next to stone.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Found three bearing trees, alive and well:
 A 10" DBH Pinon Pine bears N56° E, 19.0' distant, scribed: "T5S R6W S34 BT".
 A 10" DBH Douglas Fir bears N19° W, 23.7' distant, scribed: "T5S R6W S33 BT".
 A 9" DBH Pinon Pine bears S28° W, 50.0' distant, scribed: "T6S R6W S4 BT".

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

Record bearings and distances to bearing trees do not match original notes.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER


Corner lies on west side of a spur projecting north in Pinon and Douglas Fir timber 21.5' south of E-W fence.

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set a 30" long, 1" dia., aluminum drive post 22" in the ground in a collar of stone with a 3 1/4" dia. aluminum cap with FS logo stamped:
 Original stone next to monument.



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Nailed FS Bearing Tree signs to BT's.
 Scribed a new bearing tree: A 8" DBH Douglas Fir bears S25° E, 20.5' distant, scribed: "S3 BT".
 Nailed FS Land Survey marker sign to 8" DBH Douglas Fir tree 15' NW of monument.

Work Done By: R. Gary McCormick Title: Surveying Tech. Date: May 20, 1991

CORNER CERTIFIED CORRECT.



File No. A-13 T. 6 S. R. 6 W. M. U.S.M. Tract or Surv. No. -Cor. SC