


2 X-15

USDA-FOREST SERVICE

Index _____ CORNER RECORD _____ Tract or _____ Cor. _____
 File No. A-15 Survey No. _____ No. 1/4
 T 6 S R 6 W R.D. Duchesne County Duchesne
 Merid. Uintah Special N.F. Ashley State Utah

CORNER DIAGRAM

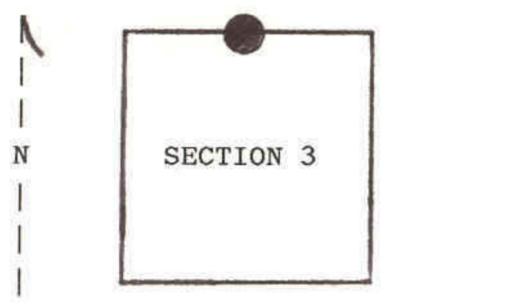

DESCRIBE CORNER MONUMENT FOUND

Found a well-set sandstone, 20"x14"x4", extending 7" above ground with a faint "1/4" scribed on the north face.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Found two original bearing trees:
 A 10" DBH Pinon Pine bears N47° E, 59.4' distant, scribed: "1/4 S34 BT".
 A 10" DBH Pinon Pine bears S20° E, 79.5' distant, scribed "1/4 S3 BT".

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER


Corner lies 5 ft. north of old E-W barb wire Forest boundary fence on steep west facing slope in Pinon pine timber. Bottom of large draw lies approximately 200 ft. west of corner position.

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Etab. By _____
 Agency _____

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set a 30" long, 1" dia., aluminum drive post 20" in the ground in a collar of stone with a 3 1/4" dia. aluminum cap with FS logo stamped:
 Original stone next to monument.



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Raised a 3'X 1' mound of stone 2' north of corner monument.
 Nailed a FS Attention sign to a Pinon pine tree 12' southwest of monument.
 Nailed FS Bearing Tree signs to BT's.

Work Done By: C. KENT MILLER Title: Land Surveyor Date: May 21, 1991

CORNER CERTIFIED CORRECT.



File No. A-15 T. 6 S. R. 6 W. M. U.S.M. Tract or Surv. No.-Cor. 1/4

SEND 13 MAY 03