


Index _____ CORNER RECORD _____ Tract or _____ Cor. _____
 File No. A-17 Survey No. _____ No. SC
 T 6 S R 6 W R.D. Duchesne County Duchesne
 M^o. Uintah Special N.F. Ashley State Utah

CORNER DIAGRAM

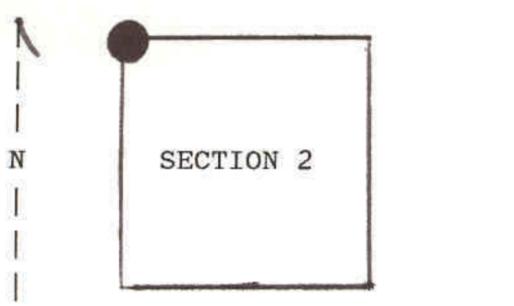

DESCRIBE CORNER MONUMENT FOUND

Found a well-set 18"X 12"X 4" sandstone with 2 notches on the east side and 4 notches on the west.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Found three bearing trees, alive and well:
 A 24" DBH Douglas Fir bears S13°30'E, 77.6' distant, scribing overgrown.
 A 8" DBH Douglas Fir bears N69°E, 72.5' distant, tree is forked with scribed fork having been sawed off, a portion of scribing still visable.
 A 10" DBH Pinon Pine bears S16°W, 110.1' distant, scribed: "T6S R6W S3 BT".

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner lies at the toe of a southwest facing slope 5' north of old fence and approximately 300' east of the bottom of Cottonwood Canyon.


PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set a 30" long, 1" dia., aluminum drive post 24" in the ground in a collar of stone with a 3 1/4" dia. aluminum cap with FS logo stamped:

Original stone next to monument.



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Raised a 3'X 2' mound of stone 3' NW of monument.

Nailed FS Bearing Tree signs to BT's.

Scribed a new bearing tree: A 9" DBH Douglas Fir bears S40°E, 15.4' distant, scribed: "T6S R6W S2 BT".

Nailed FS Land Survey marker sign to fence post 10' SE of monument.

Work Done By: Henry J. Peterson Title: Surveying Tech. Date: May 22, 1991

CORNER CERTIFIED CORRECT.



File No. A-17 T. 6 S. R. 6 W. M. U.S.M. Tract or Surv. No.-Cor. SC