DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R4W

W 1/16

SEC 9

U.S.B.&M.

T-10

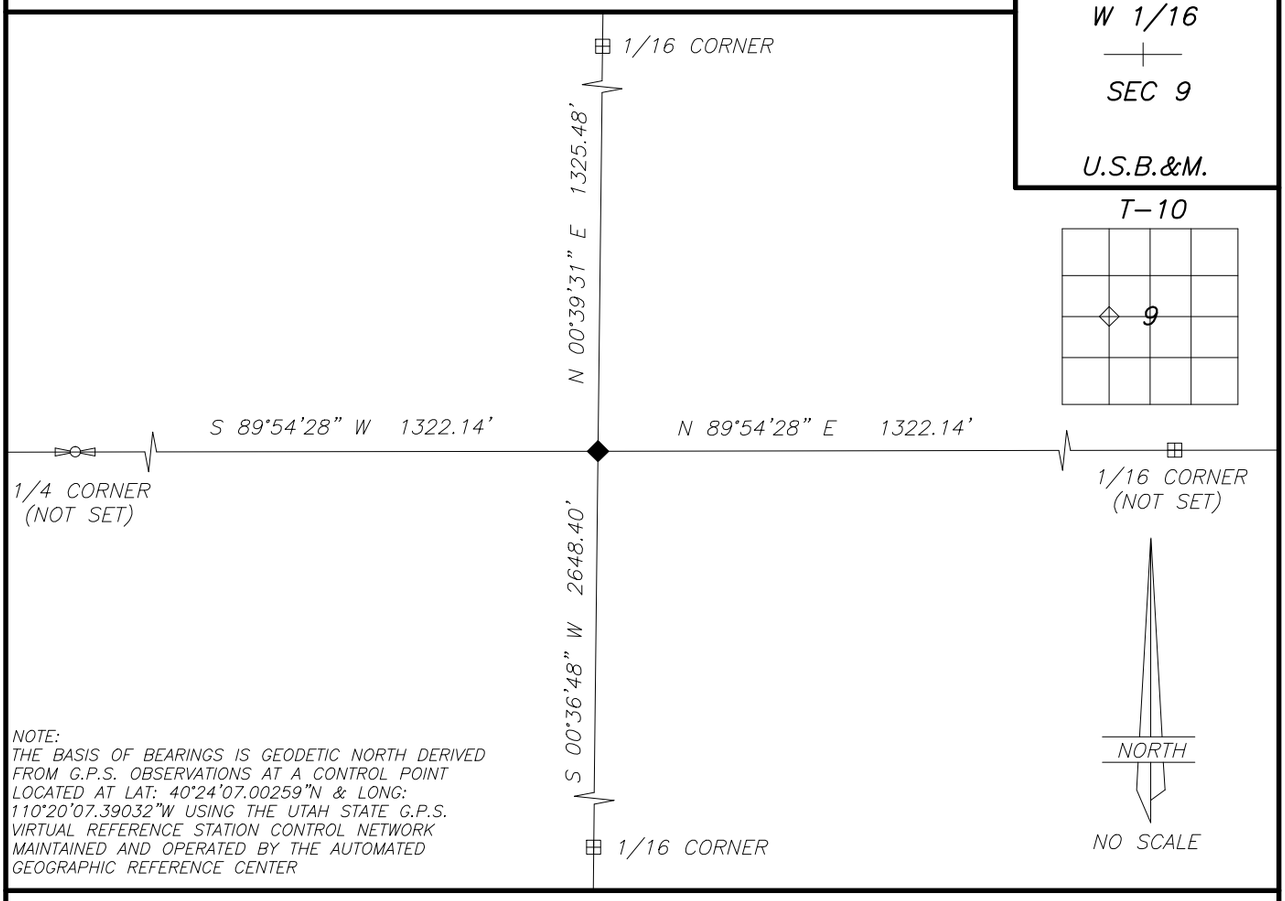

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED AT LAT: 40°24'07.00259"N & LONG: 110°20'07.39032"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

POSITION OF CORNER WAS DETERMINED BY SINGLE PROPORTIONATE MEASUREMENT BETWEEN EAST AND WEST QUARTER CORNERS

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET 5/8" REBAR WITH ALUMINUM CAP STAMPED; PLS 148951 AT 1/16 CORNER REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7319909.24
E: 1961734.88

LATITUDE: 40°24'33.64772" N

LONGITUDE: 110°20'45.93309" W

PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0040W0_320540

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 8 FEB '16

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

PROFESSIONAL LAND SURVEYOR
No. 148951
JERRY D. ALLRED
8 FEB '16
STATE OF UTAH