DRAWING NUMBER

SAFCO PRODUCTS • NEW HOPE, MINNESOTA
REORDER BY PART NUMBER 6551

DRAWING NUMBER

SAFCO PRODUCTS • NEW HOPE, MINNESOTA
REORDER BY PART NUMBER 6551

DRAWING NUMBER

1968 3 of 6

SAFCO PRODUCTS • NEW HOPE, MINNESOTA
REORDER BY PART NUMBER 6551

DRAWING NUMBER

SAFCO PRODUCTS • NEW HOPE, MINNESOTA
REORDER BY PART NUMBER 6551

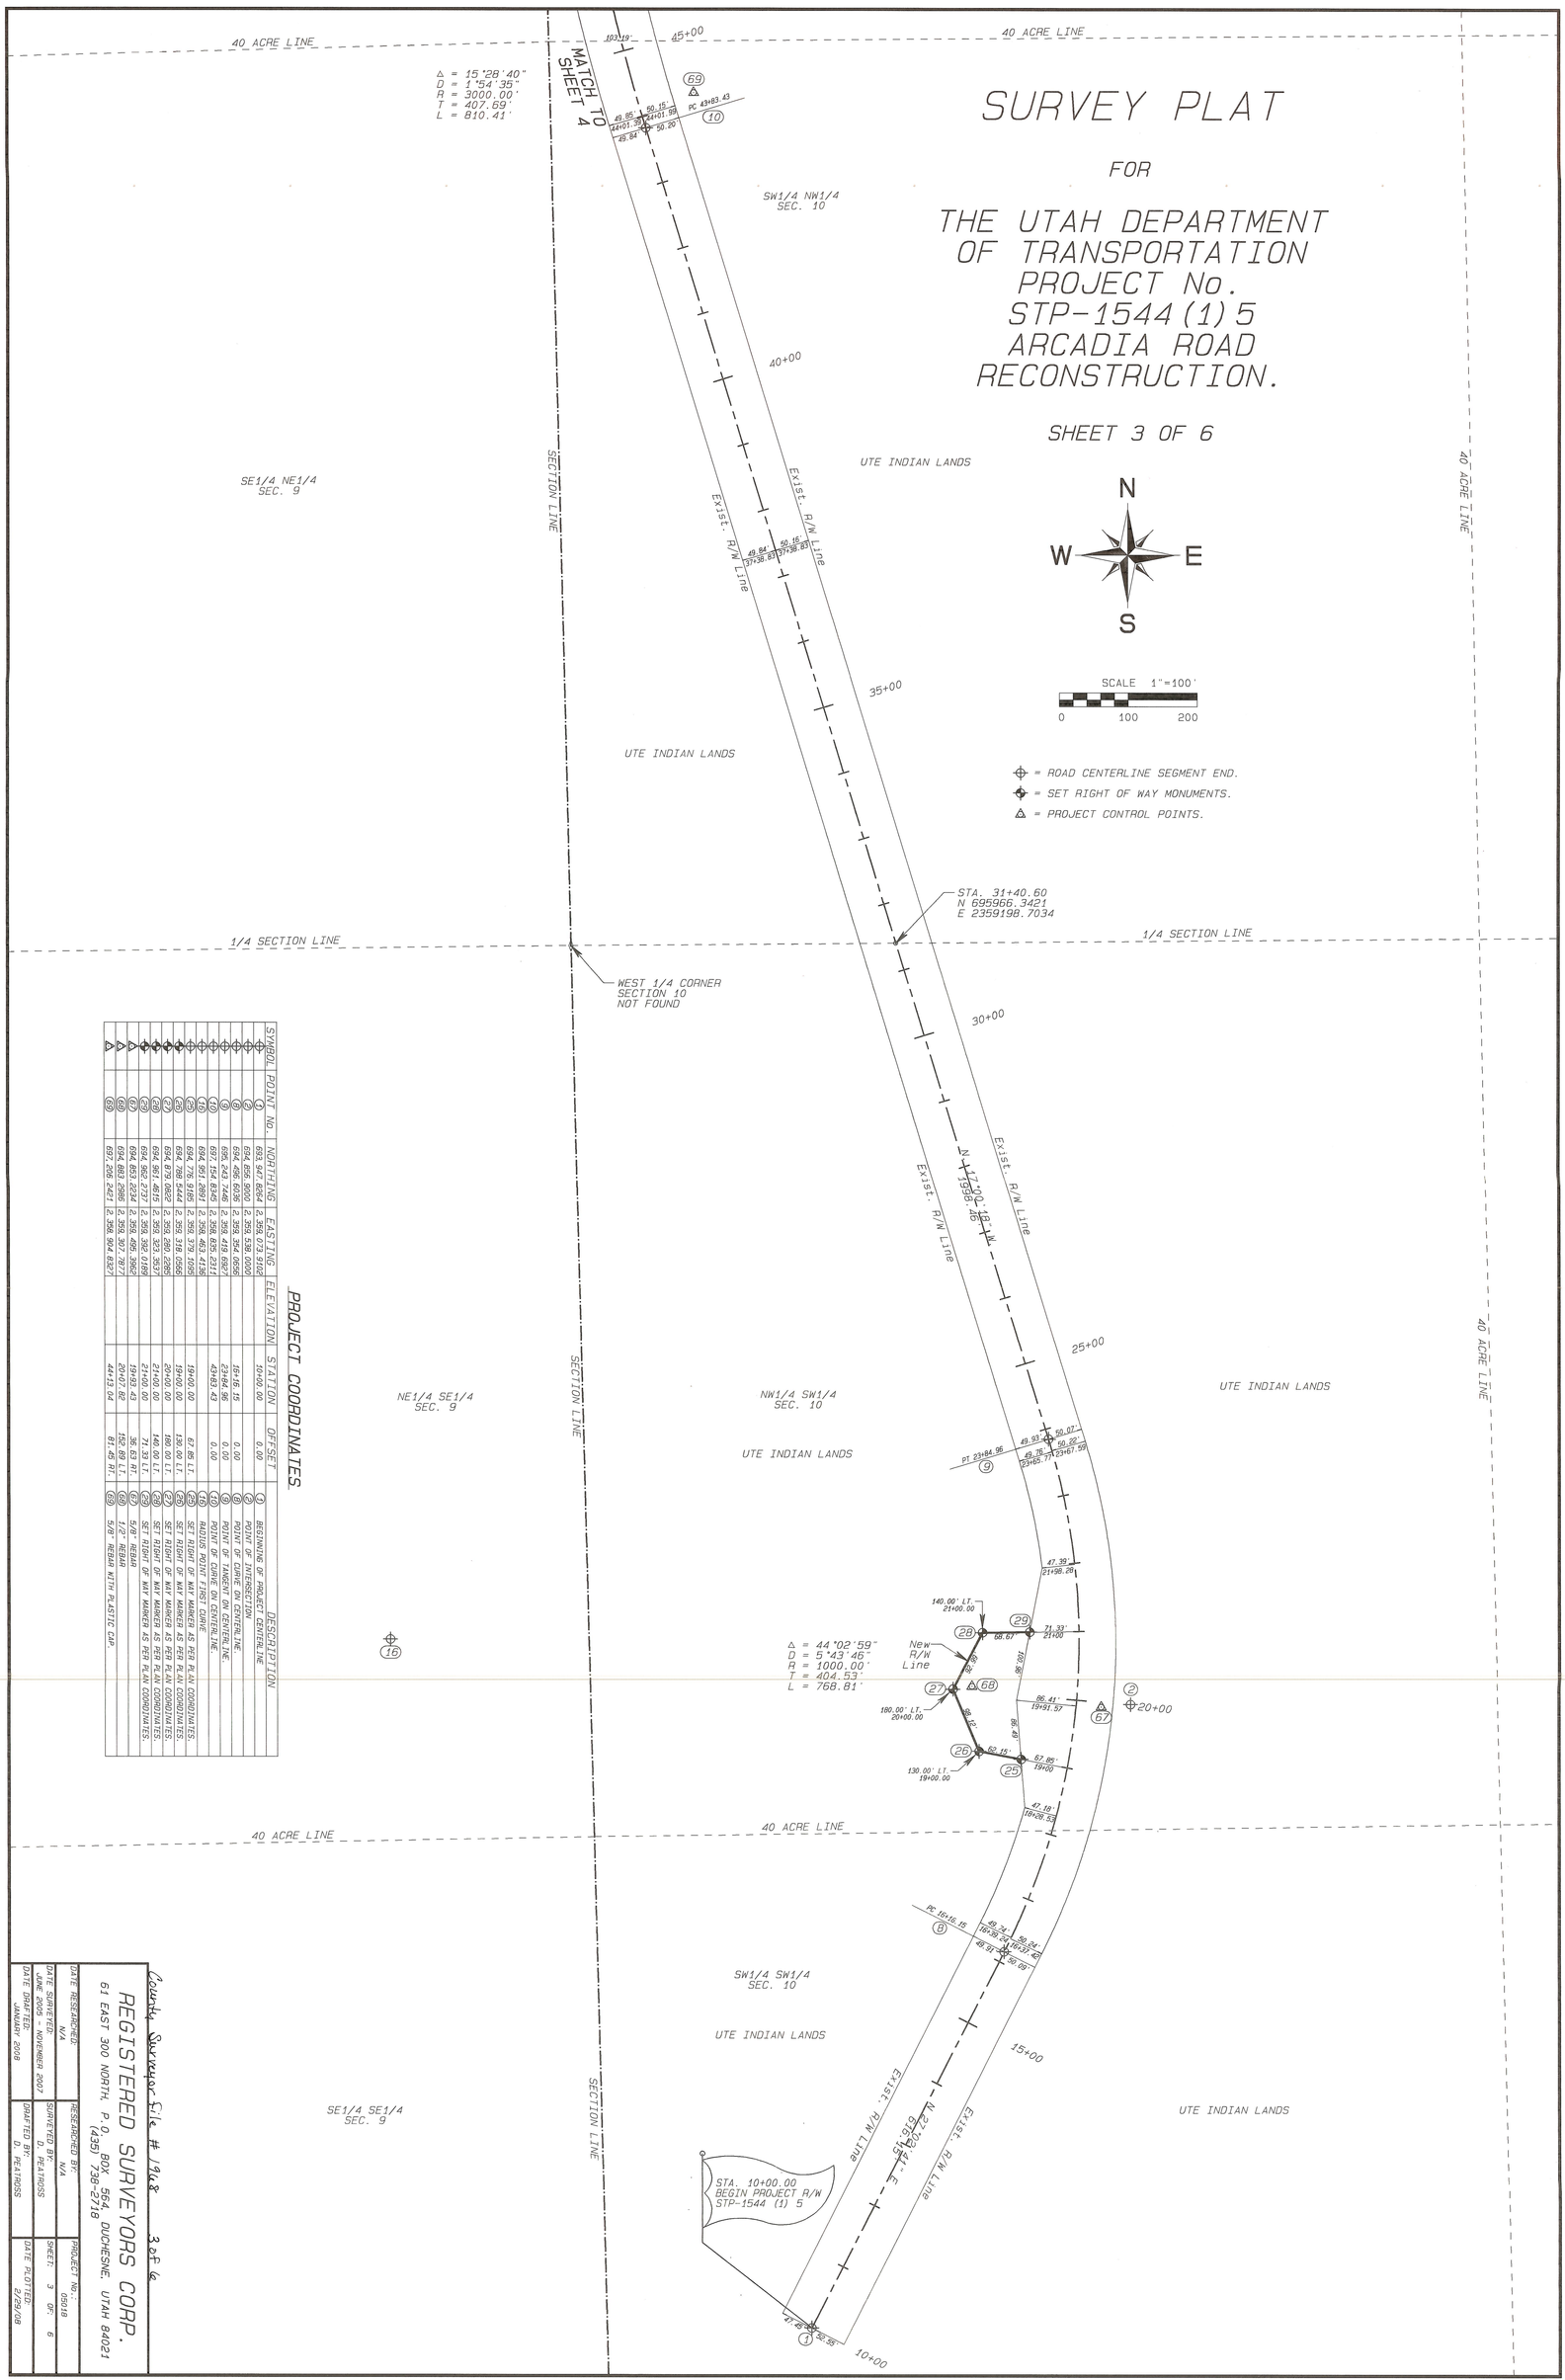

PROJECT COORDINATES

SYMBOL	POINT No.	NORTHING	EASTING	ELEVATION	STATION	OFFSET	DESCRIPTION
⊕	(1)	693,947.8264	2,359,073.9102		10+00.00	0.00	(1) BEGINNING OF PROJECT CENTERLINE
⊕	(2)	694,856.9000	2,359,538.0000				(2) POINT OF INTERSECTION
⊕	(3)	694,486.6036	2,359,354.0656		19+16.15	0.00	(3) POINT OF CURVE ON CENTERLINE.
⊕	(4)	695,243.7446	2,359,418.6927		23+84.96	0.00	(4) POINT OF TANGENT ON CENTERLINE.
⊕	(5)	697,154.8345	2,359,835.2311		43+83.43	0.00	(5) POINT OF CURVE ON CENTERLINE.
⊕	(6)	694,951.2891	2,359,463.4136				(6) RADIUS POINT FIRST CURVE
⊕	(7)	694,776.9185	2,359,379.1095		19+00.00	67.86 LT.	(7) SET RIGHT OF WAY MARKER AS PER PLAN COORDINATES.
⊕	(8)	694,788.5444	2,359,318.0566		19+00.00	130.00 LT.	(8) SET RIGHT OF WAY MARKER AS PER PLAN COORDINATES.
⊕	(9)	694,879.0822	2,359,280.2285		20+00.00	180.00 LT.	(9) SET RIGHT OF WAY MARKER AS PER PLAN COORDINATES.
⊕	(10)	694,961.4615	2,359,323.3637		21+00.00	140.00 LT.	(10) SET RIGHT OF WAY MARKER AS PER PLAN COORDINATES.
⊕	(11)	694,962.2737	2,359,350.0189		21+00.00	71.33 LT.	(11) SET RIGHT OF WAY MARKER AS PER PLAN COORDINATES.
△	(12)	694,853.2234	2,359,459.3962		19+00.43	36.63 RT.	(12) 5/8" REBAR
△	(13)	694,883.2986	2,359,307.7877		20+07.82	152.89 LT.	(13) 1/2" REBAR
△	(14)	697,206.2421	2,359,904.8327		44+13.04	81.45 RT.	(14) 5/8" REBAR WITH PLASTIC CAP.

County Surveyor File # 1968 3 of 6

REGISTERED SURVEYORS CORP.
61 EAST 300 NORTH, P.O. BOX 564, DUCHESNE, UTAH 84021
(435) 738-2718

DATE RESEARCHED: N/A	RESEARCHED BY: N/A	PROJECT No.: 050.18
DATE SURVEYED: JUNE 2005 - NOVEMBER 2007	SURVEYED BY: D. PEATROSS	SHEET: 3 OF: 6
DATE DRAFTED: JANUARY 2008	DRAFTED BY: D. PEATROSS	DATE PLOTTED: 2/29/08