

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T1S R4W

1/4

SEC 31 | SEC 32

U.S.B.&M.

C-5

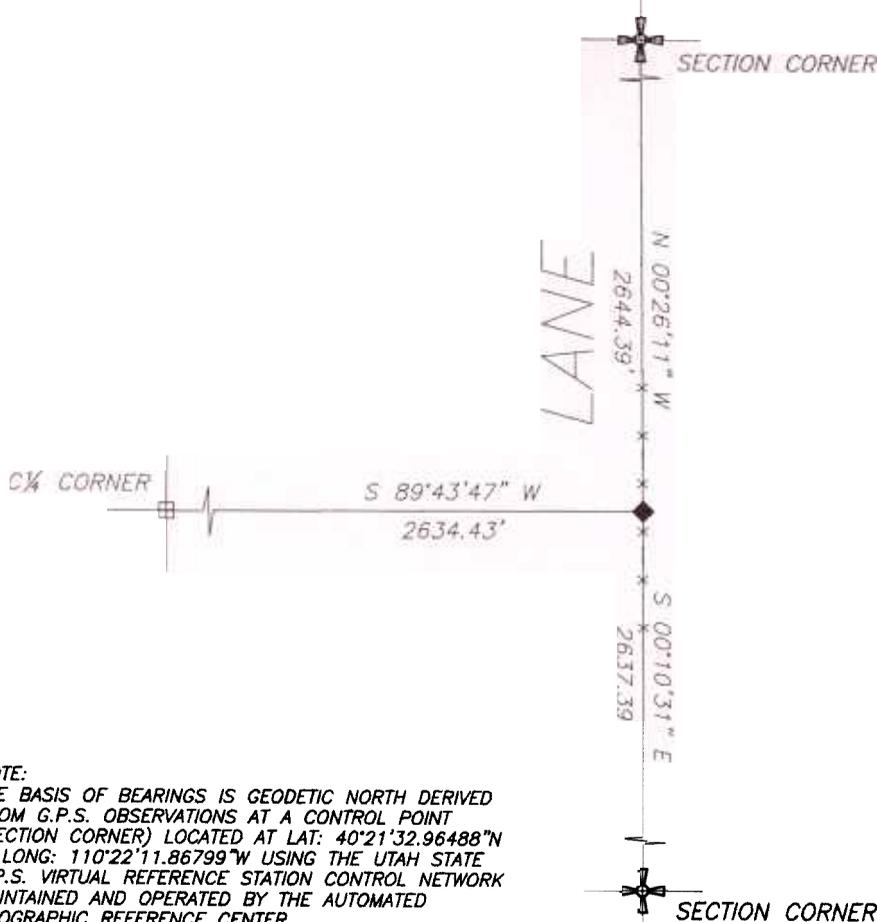

NO SCALE


NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT: 40°21'32.96488"N & LONG: 110°22'11.86799"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

THE UTAH STATE DEPT. OF TRANS. HIGHWAY PLATS SHOW THAT AT THE TIME THE PLATS WERE PREPARED FOR STATE HIGHWAY 87, THE ORIGINAL STONE 1/4 CORNER WAS STILL IN PLACE. THE PLATS REFERENCED THE STONE TO THE HIGHWAY STATIONING. THIS INFORMATION WAS USED TO RESET THE CORNER. THE POSITION WAS FOUND TO BE UNDER A NORTH-SOUTH FENCE LINE AND NEARLY IN LINE WITH A FENCE LINE TO THE WEST. (1983)

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

THE 2 1/2" ALUMINUM COUNTY MONUMENT THAT WAS SET IN 1983 WAS FOUND PULLED OUT OF THE GROUND BY ROAD CONSTRUCTION EQUIPMENT AND UNDER A NEWLY BUILT FENCE. A NEW 2 1/2" ALUMINUM COUNTY MONUMENT WAS RE-SET AT THE CORNER POSITION USING TIES FROM SAID 1983 SURVEY. MONUMENT STAMPED;

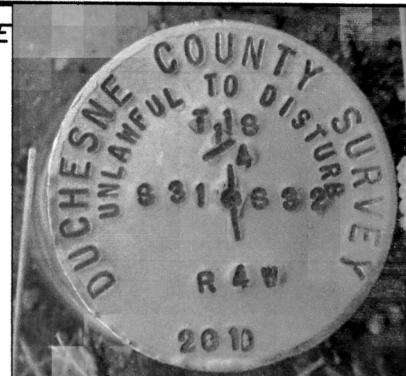

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
7298899.358
1955372.672

LATITUDE: 40°21'06.84264"N

LONGITUDE: 110°22'11.60785"W

PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0040W0_200140

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 Sep 2010

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

